


AX01R030VABBR600

Product Details

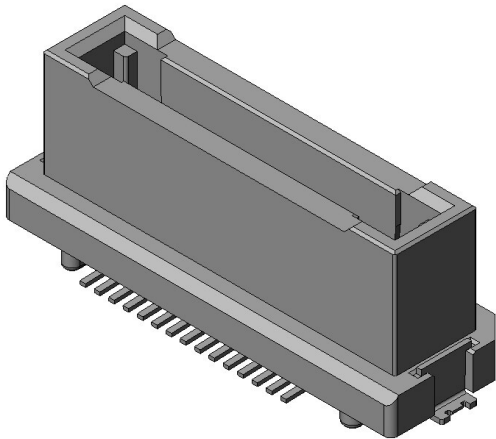

Features

Floating board-to-board connector, High-speed transmission, 30 pos., PCB mounted height: 6.6 mm, Fixed side straight type

| | |
|---|--|
| Part Number | AX01R030VABBR600 |
| Status | Active(NRND) |
| Number of Positions | 30 pos. |
| Contact Pitch | 0.635 mm pitch |
| Rated Current | 0.5 A |
| Rated Voltage | AC 50 Vr.m.s. |
| Applications | FA equipment, semiconductor manufacturing equipment, office machines, communication equipment, measuring equipment, broadcasting equipment, gaming and arcade machines, and other various applications |
| Connector Type | Fixed side |
| Connector Style | Straight |
| PCB Mounting Method | Soldering (SMT) |
| Material of Contact | Copper alloy |
| Finish of Contact in Connecting Area | Gold plating |
| Minimum Thickness of The Plating Contact Area | 0.1 micrometer min. |

| | |
|--|--|
| Finish of Contact in PCB Mounting Area | Gold plating |
| Material of Insulator | LCP |
| PCB Mounted Height | 6.6 mm |
| Existence of Polarization Key | With Key |
| Existence of Location Boss | With Boss |
| PCB Boardlock Feature | Hold-down |
| Body Length | 17.745 mm |
| Body Breadth | 6.8 mm |
| Operating Temperature Range | -40 deg. C to +105 deg. C |
| Mating Cycles | 100 mating cycles |
| Finish of Hold-down | Copper alloy/ Tin plating |
| Packaging Type | Embossed tape packaging |
| Quantity in The Standard Packaging | 600 pieces/ reel |
| RoHS compliant | 10 substances (2011/65/EU, (EU)2015/863) |
| REACH compliant | 240 substances (23/01/2024) |
| Combination | AX01F030VAABR500 AX01F030VABBR300 AX01F030VACBR150 AX01R030VABBR600 |
| Remarks | |

Related information

Product Videos





AX01 Series

Notice

1. The values specified in this web site are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products.

For purchase, a product specification must be agreed upon.

2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.
3. The products presented in this web site are designed for the uses recommended below. We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:

- * Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:

Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster evention equipment, etc.

- * We may separately give you our support with a quality assurance program that you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

- * Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc