


MX34R32VF1

Product Details

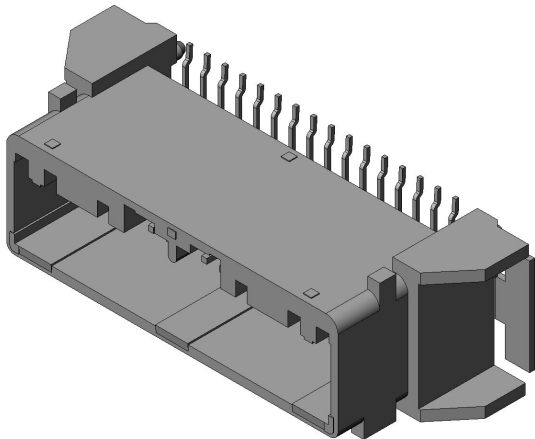

Features

Compact non-waterproof automotive connector, High-density, ECU, switches, and sensors, 32 pos. Straight Pin header

| | |
|-------------------------|------------------|
| Part Number | MX34R32VF1 |
| Status | Active |
| Number of Positions | 32 pos. |
| Contact Pitch | 2.2 mm |
| Rated Current | 3 A |
| Connector Type | Pin header |
| Connector Style | Straight |
| Contact Type | Pin |
| Wire Termination Style | - |
| PCB Side Mounting Style | Soldering (SMT) |
| Material of Insulator | Glass filled PPS |
| Color of Insulator | Black |
| Material of Contact | Copper alloy |
| Finish of Contact | Tin plating |
| Board Fixing Method | Hold-down |
| Applicable Contacts | - |

| | |
|-------------------------|--|
| Applicable Cable | - |
| Hand Crimping Tool | - |
| Contact Extraction Tool | - |
| RoHS compliant | 10 substances (2011/65/EU, (EU)2015/863) |
| REACH compliant | 233 substances (17/01/2023) |
| Combination | MX34032SF1 |
| Remarks | |

Related information

Product Videos



Notice

1. The values specified in this web site are only for reference. The products and their specifications are subject to change without notice.
Contact our sales staff for further information before considering or ordering any of our products.
For purchase, a product specification must be agreed upon.
2. Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry. Also contact us regarding the details of use, usage, specification before considering or ordering any of our products.
3. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.