


# WR-120SB-VF-N1-R1500

## Product Details

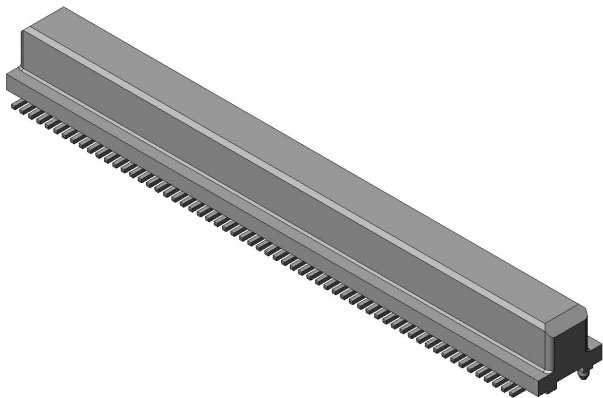

### Features

0.5mm pitch, SMT, parallel, 120 pos., Receptacle, Emboss reel product

Part Number	WR-120SB-VF-N1-R1500
Status	Active
Number of Positions	120 pos.
Contact Pitch (mm)	0.5 mm
Rated Current (A)	0.3 A
Connector Type	Receptacle
Connector Style	Straight
Number of Rows	2
PCB Mounting Method	Soldering (SMT)
Material of Contact	Phosphor bronze
Finish of Contact in Connecting Area	Gold plating over Nickel
Minimum Thickness of The Plating Contact Area (micrometer)	0.1
Finish of Contact in PCB Mounting Area	Gold flash plating over Nickel



\* We may separately give you our support with a quality assurance program that you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

\* Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc