

E

D

C


B

A

DGF-C-212J (20.07)


989971JS  
( 0N 9N1MVR8 )

版数 VER.	年月日 DATE	CN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
------------	-------------	--------	---------------------	-----------	------------	-------------	-------------

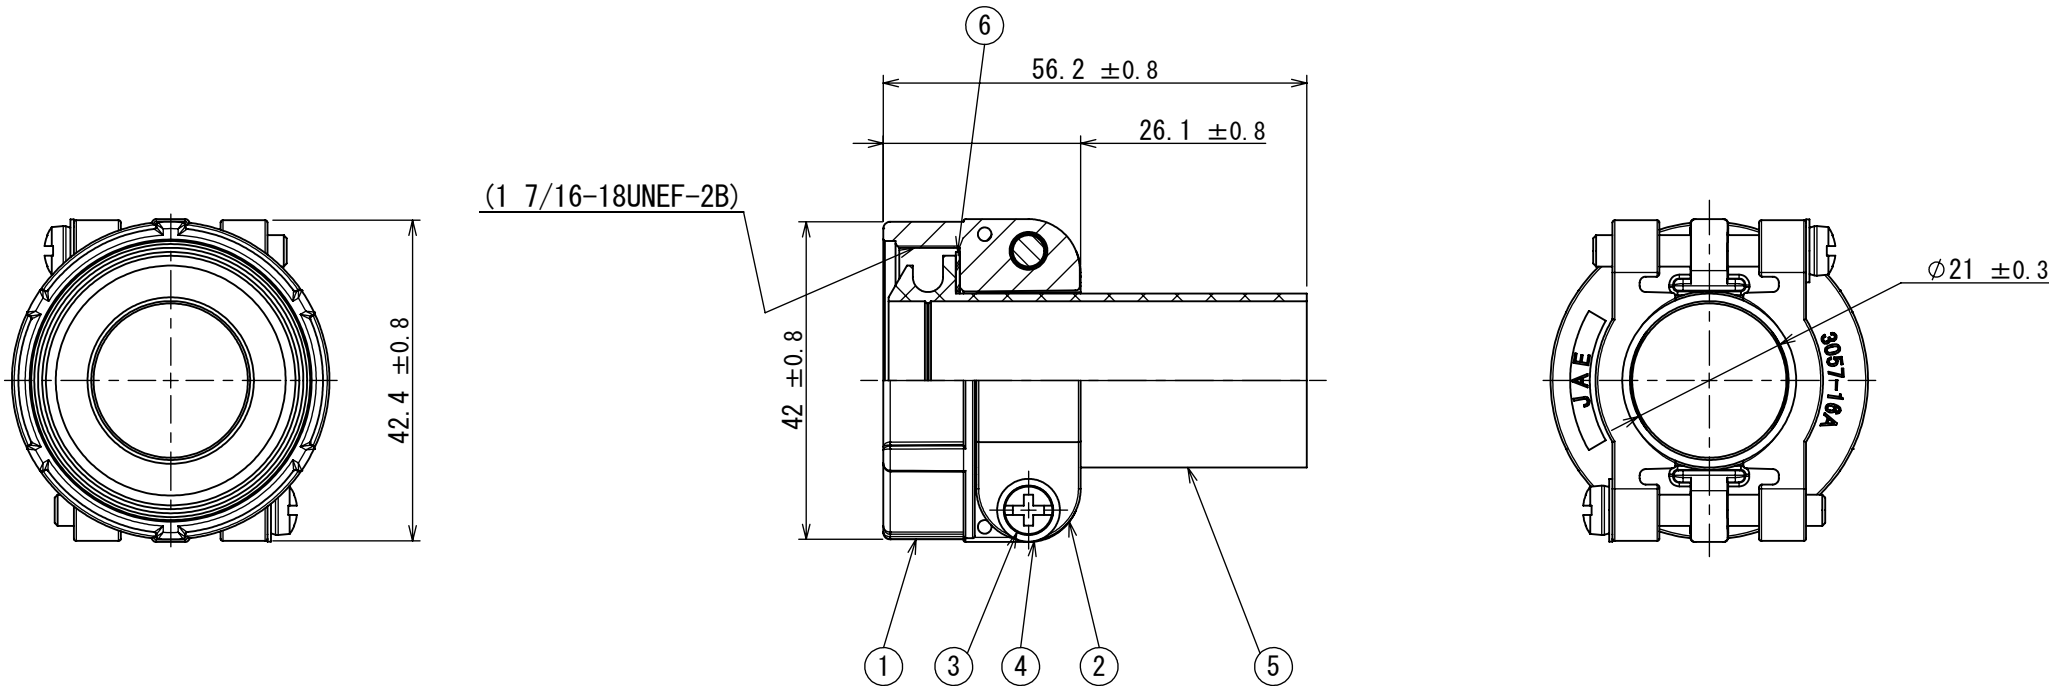

NOTE1. APPLICABLE CABLE DIAMETER  $\Phi 18 \sim \Phi 20$   
注1. 適合ケーブル径  $\Phi 18 \sim \Phi 20$

6	WASHER	1	SYNTHETIC RESIN	—	
5	BUSHING	1	CR	—	
4	WASHER	2	STEEL	COATING	COLOR : BLACK
3	SCREW	2	COPPER ALLOY	COATING	COLOR : BLACK
2	CLAMP SADDLE	2	ALUMINUM ALLOY	COATING	COLOR : BLACK
1	GLAND NUT	1	ALUMINUM ALLOY	COATING	COLOR : BLACK
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION) JACS-50101-5		第1版 (ORIGINAL DATE) 03/JUN/2022		尺度 (SCALE) 2:1	シリーズ (SERIES) JL10	日本航空電子工業株式会社  JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	図面番号 (DRAWING NO.) SJ125586	版数 (VER.) 1
		製図 DR.	—	名称 (TITLE) JL10/W-2428CK (20) -CR				
一般公差 (GENERAL TOLERANCE)  寸法 (DIMENSION)      角度 (ANGLES)  ±      ×° ± ×      ×°×' ± ×× ± ××× ±		担当 CHK.	H. SUZUKI					
		査閲 APPD.	T. SUZUKI					
		承認 APPD.	H. EBIHARA					
単位 (UNIT) : mm		シート (SHEET NO.) 1 OF 1		質量 (MASS) —	