

Charging and Discharging System Connector for EV  
**KW1C series**  
(UL and cUL Recognized and JCS Standard Compliant )

CONNECTOR  
MB-0383-1  
Oct. 2022

RoHS Compliant



Powerlance branded EV charging connectors combine durability and high-quality performance to provide the industry's most dependable solutions.



KW1C series connectors are CHAdeMO compliant and designed to be used with fast chargers. Previous generation KW1 used a combination of materials for the core of the body. This product is approximately 20% lighter with the use of a weather resistant resin material. The KW1C was also designed with stainless steel for critical components, such as the latch and internal locking mechanisms, to maintain high reliability. The design has been enhanced to give a more user friendly experience during the charging process. The light-weight and compact solution makes KW1C the optimal choice for EV charger installers where mass installation is required.

Thanks to V2X system and KW1C technology the Electric Vehicle Power System (EVPS) can continue to operate as a portable power storage even in power outages.

This product is UL and cUL recognized, and also complies with the JCS standard. This product can be installed into EV charging systems for use in the United States, Canada, Japan, and other regions following UL/cUL and JCS standards.

### Application

- Quick Charger for EV (CHAdeMO protocol)
- Charging and Discharging System for EV (CHAdeMO protocol)

### Features

- Compliant with CHAdeMO specifications Ver.2.0
- Compliant with the EV Charging and Discharging System Guidelines (EVPS-002) Ver.2.1
- UL and cUL recognized products
- Compatible with JCS standard
- Highly reliable design using materials which are tough against various environmental conditions
- Lightweight and highly reliable design

## General Specifications

Number of Contacts	Power: 2 pos 12V Power : 2 pos Signal: 6 pos
Rated Current	Power: 150A max. <sup>1</sup> 12V Power :6.4A Signal: 2A
Rated Voltage	Power: DC500V 12V Power & Signal: DC16V max.
Insulation Resistance	100 MΩ min. (Apply DC500V between adjacent contacts)
Dielectric Withstanding Voltage	AC 3,000V / 1 minute
Durability	10,000 times
Insertion Force	100N max.
Operating Temperature Range <sup>1</sup>	-30°C to +50°C (Rated current: 125A) -30°C to +40°C (Rated current: 150A)

<sup>1</sup> Rated current is dependent on operating temperature.

## Materials and Finishes


Component	Material	Finishing
Body	Environment Resistant Resin	-
Release Button	Environment Resistant Resin	-
Lock Lever	Stainless Steel	-
Insulator	Environment Resistant Resin	-

Lock Lever




Insulator

Release Button

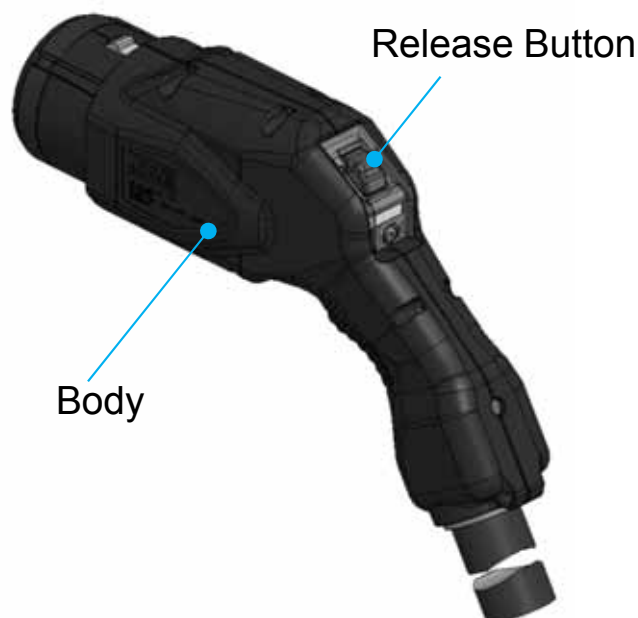

Body

## Ordering Information

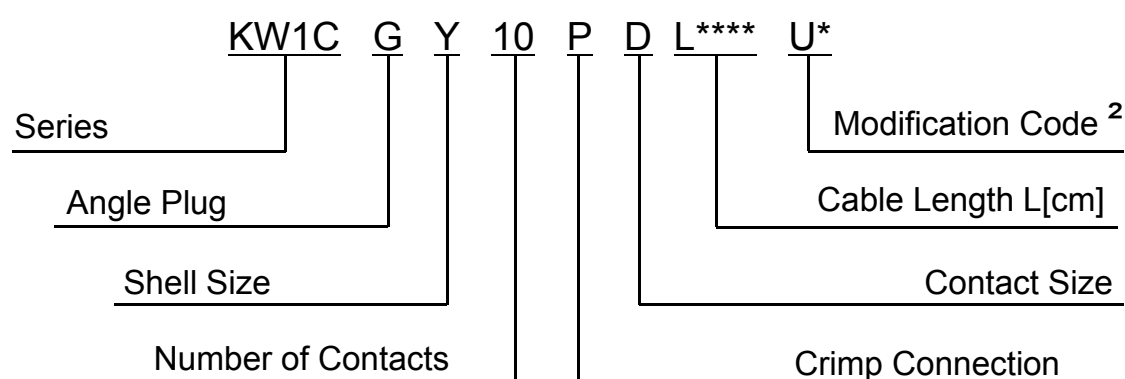

<sup>2</sup> Modification code represents differences in operating temperature range and rated current.

Modification Code	Operating Temperature Range	Rated Current
U	-30°C to +40°C	150A
U1	-30°C to +50°C	125A


## Part Number List

Part Number	Drawing No.	Cable Length	Specifications	Handling Instructions
KW1CGY10PDL0300U	SJ124925	3.0m	JACS-40237	JAHL-40237
KW1CGY10PDL0350U		3.5m		
KW1CGY10PDL0400U		4.0m		
KW1CGY10PDL0450U		4.5m		
KW1CGY10PDL0500U		5.0m		
KW1CGY10PDL0550U		5.5m		
KW1CGY10PDL0600U		6.0m		
KW1CGY10PDL0650U		6.5m		
KW1CGY10PDL0700U		7.0m		
KW1CGY10PDL0750U		7.5m		
KW1CGY10PDL0800U		8.0m		
KW1CGY10PDL0850U		8.5m		
KW1CGY10PDL0900U		9.0m		
KW1CGY10PDL0950U		9.5m		
KW1CGY10PDL1000U		10.0m		


Part Number List
------------------

Part Number	Drawing No.	Cable Length	Specifications	Handling Instructions
KW1CGY10PDL0300U1	SJ125591	3.0m	JACS-40242	JAHL-40242
KW1CGY10PDL0350U1		3.5m		
KW1CGY10PDL0400U1		4.0m		
KW1CGY10PDL0450U1		4.5m		
KW1CGY10PDL0500U1		5.0m		
KW1CGY10PDL0550U1		5.5m		
KW1CGY10PDL0600U1		6.0m		
KW1CGY10PDL0650U1		6.5m		
KW1CGY10PDL0700U1		7.0m		
KW1CGY10PDL0750U1		7.5m		
KW1CGY10PDL0800U1		8.0m		
KW1CGY10PDL0850U1		8.5m		
KW1CGY10PDL0900U1		9.0m		
KW1CGY10PDL0950U1		9.5m		
KW1CGY10PDL1000U1		10.0m		

## Outer Dimensions

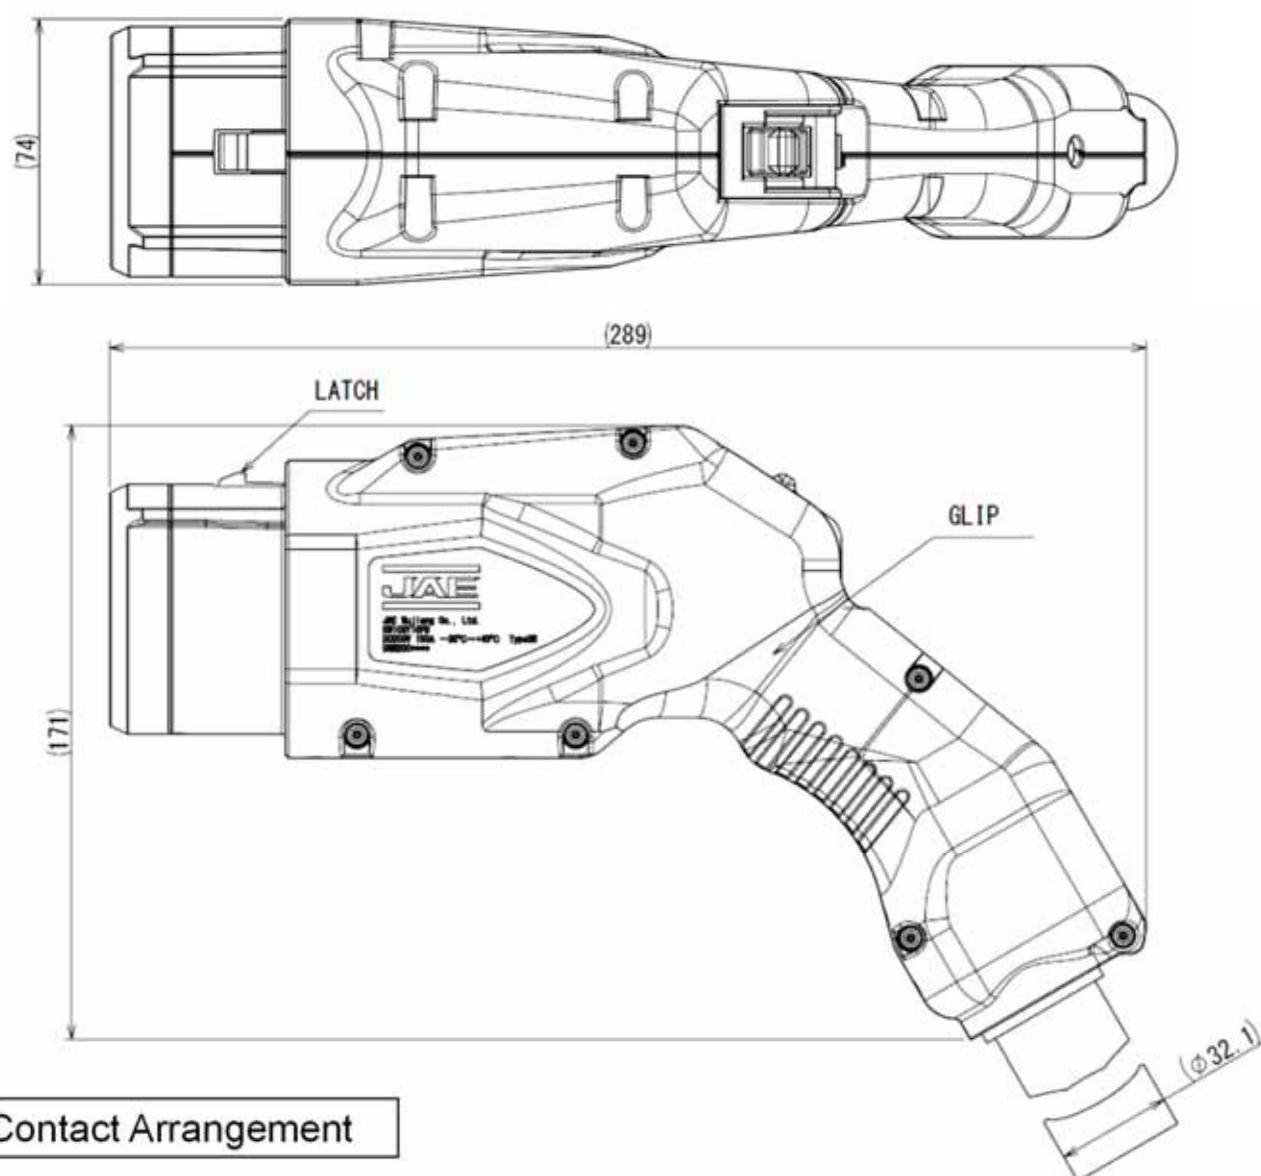


## Contact Arrangement

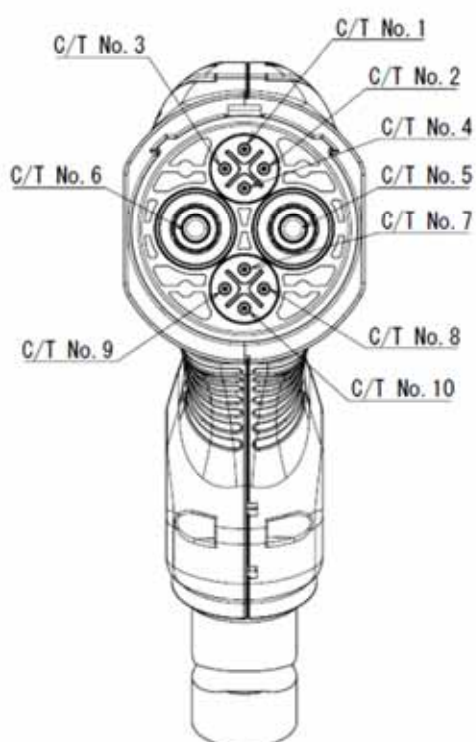

C/T No.	CABLE	
	SIZE [AWG]	COLOR/MARKING
1	16	RED
2	18	ORANGE
3	16	BROWN
4	18	BLACK/WHITE
5	2	BLUE
6	2	BLACK
7	18	ORANGE/WHITE
8	18	GRAY
9	18	PURPLE
10	18	WHITE
LED (+)	18	GREEN
LED (-)	18	PINK

## Connector Circuit Diagram

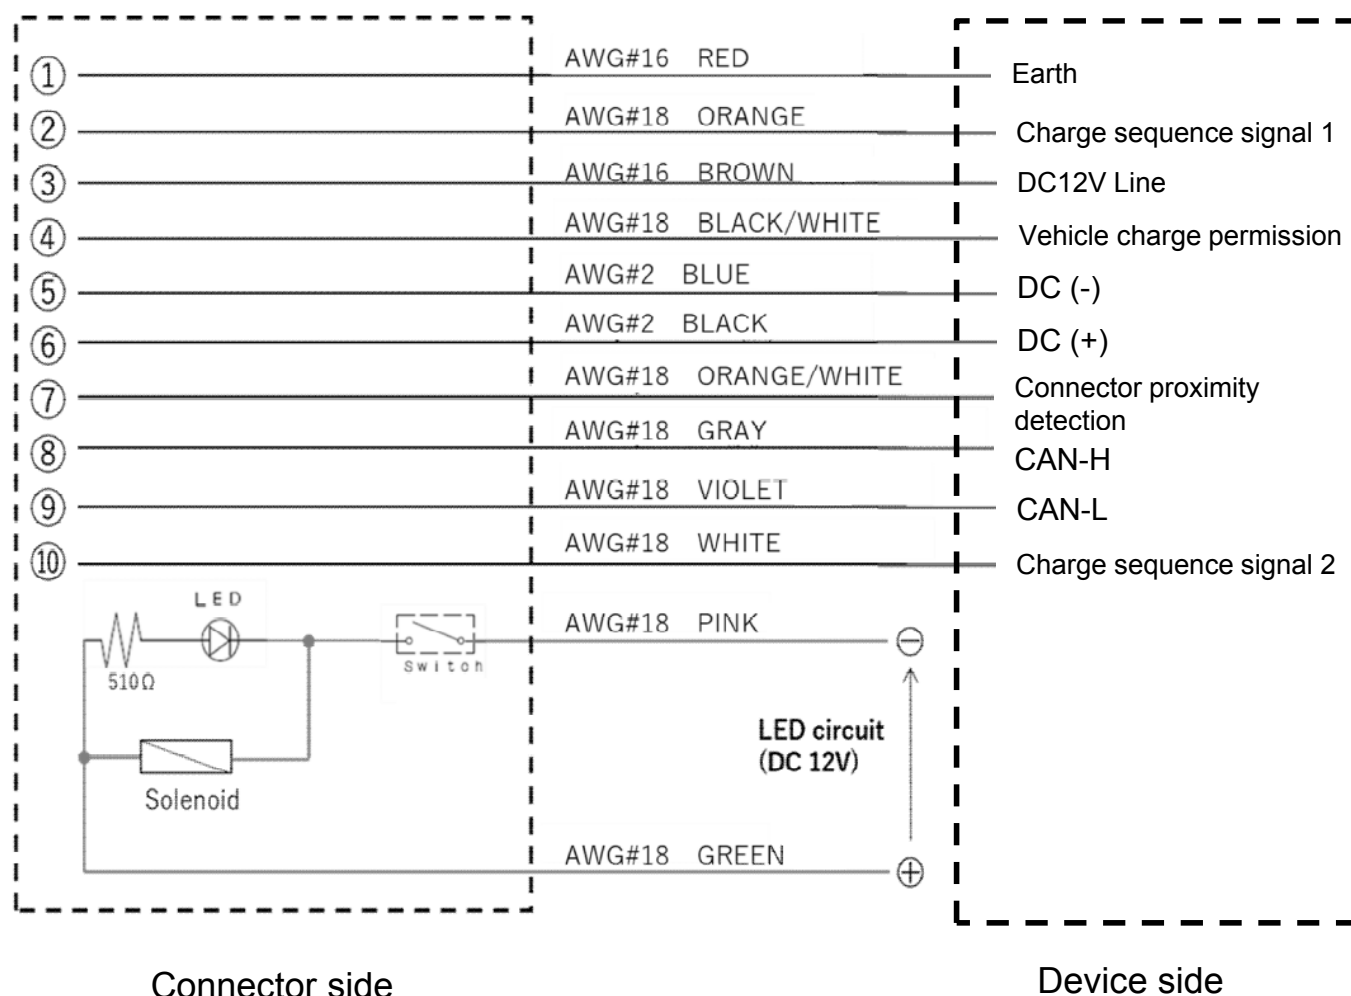

### Notice:

1. The values specified in this brochure are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products. For purchase, a product specification must be agreed upon.

2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.

3. The products presented in this brochure are designed for the uses recommended below. We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:

(i) Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:

Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster prevention equipment, etc.

(ii) We may separately give you our support with a quality assurance program that

you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc.

**Japan Aviation Electronics Industry, Limited**

\* The specifications in this brochure are subject to change without notice. Please contact JAE for information.