



DCF-C-212F(05.08)

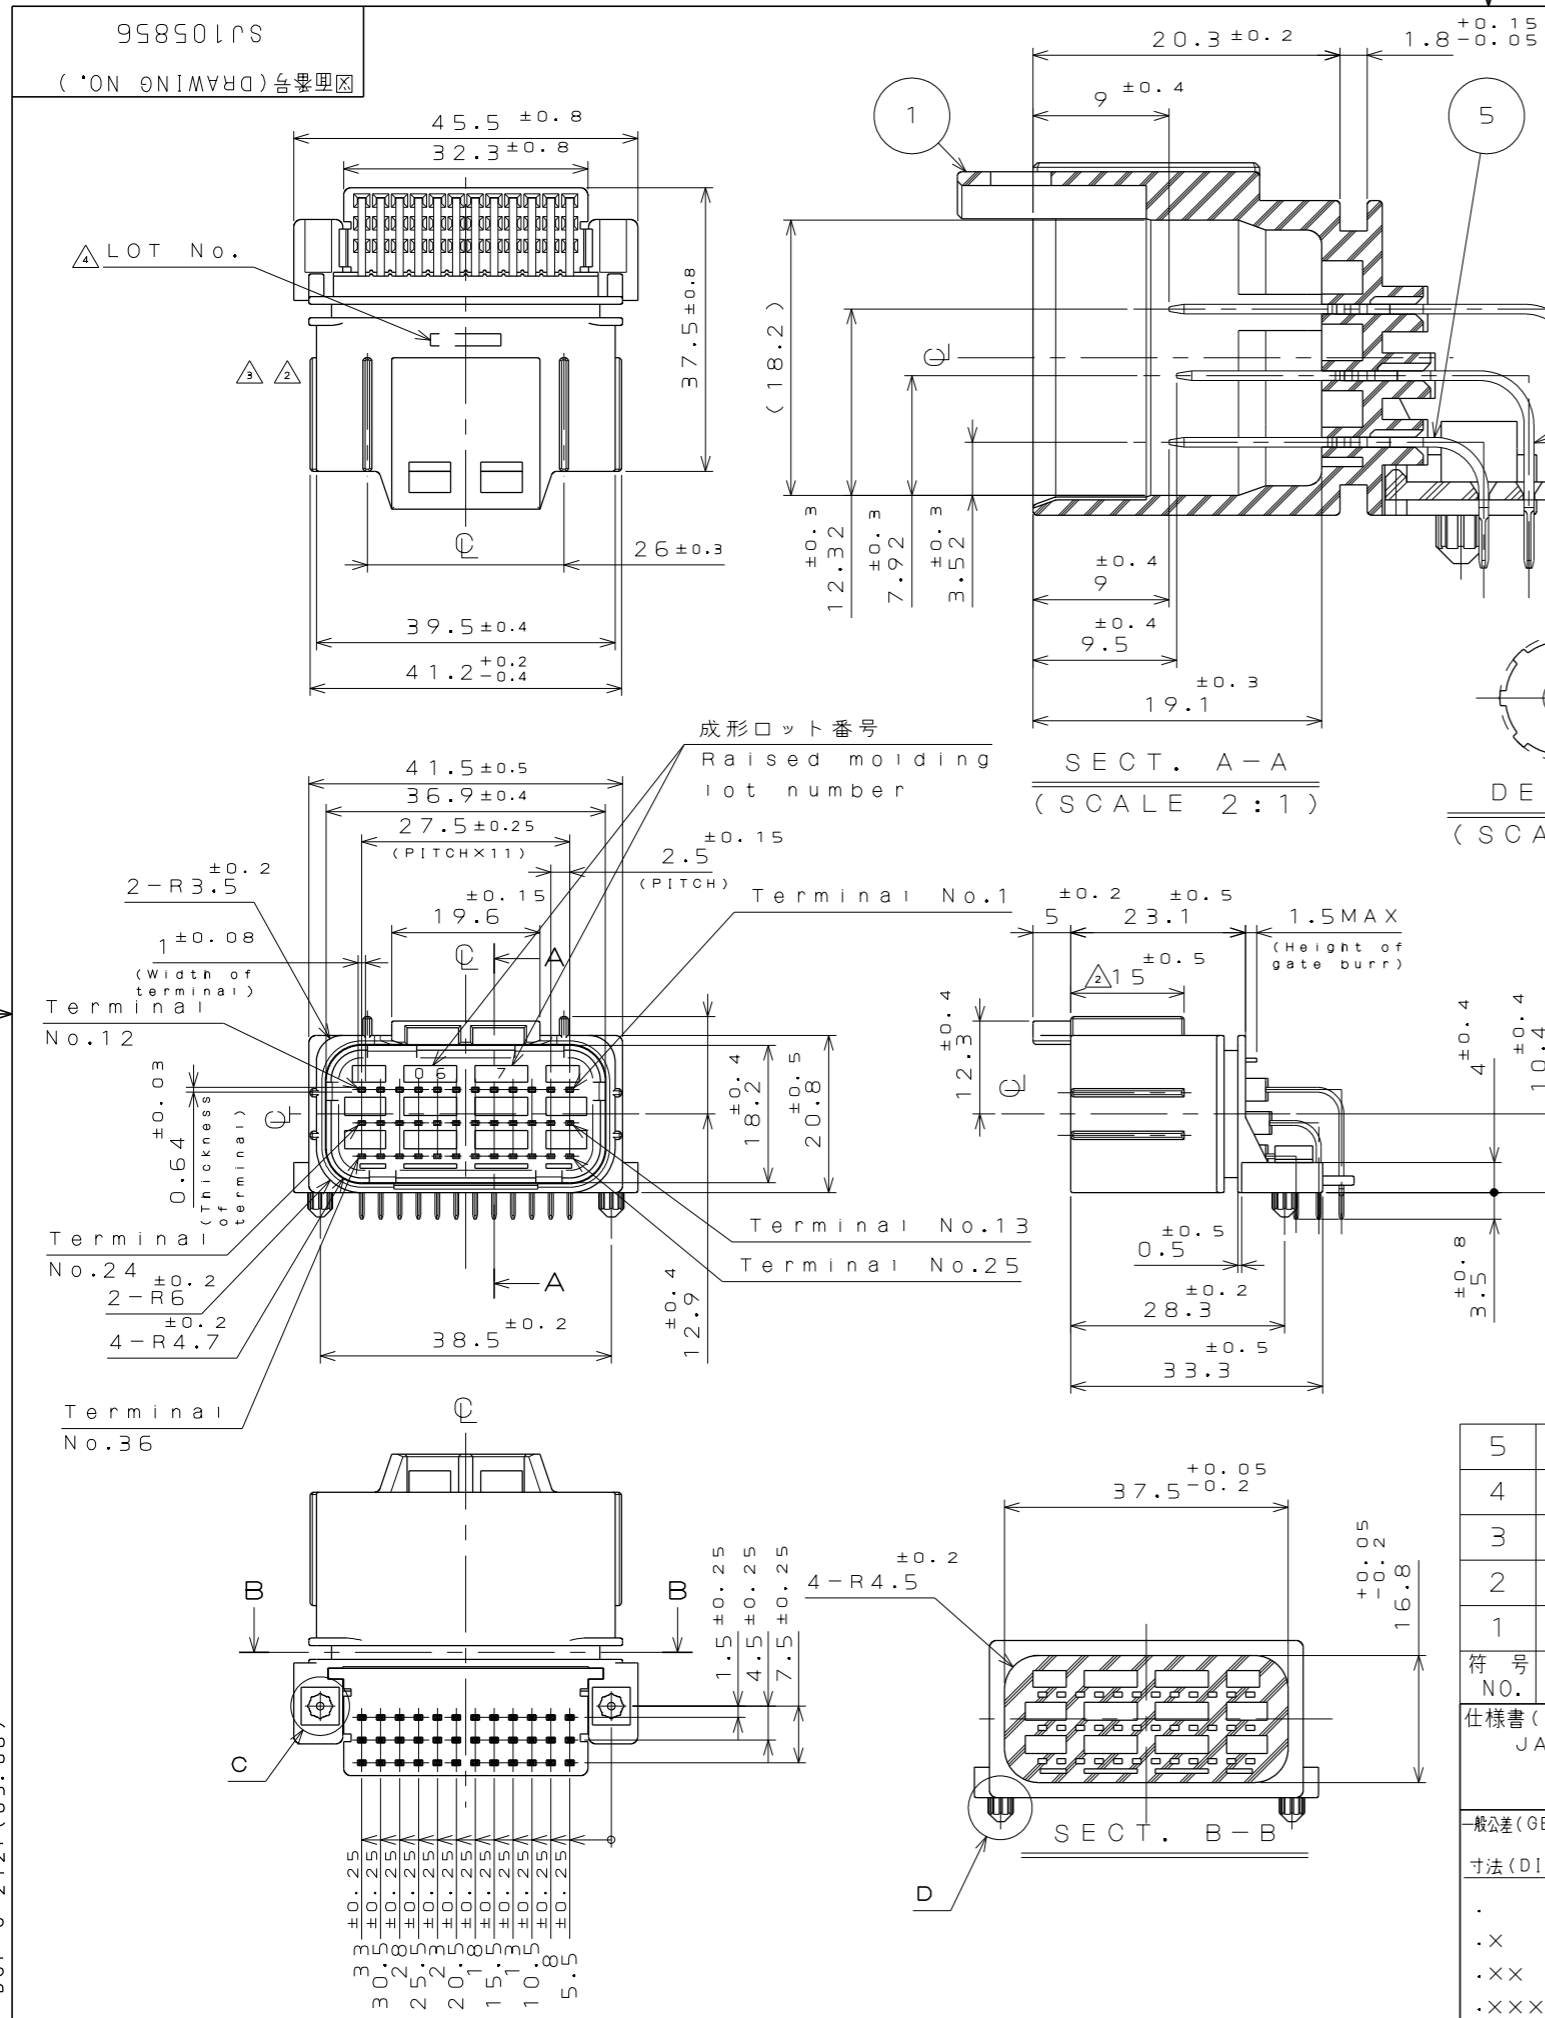

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	14.Sep.2006	061067	REVISED KEY DIMENSIONS	T.HASEGAWA	N.OIRI		T.TOTANI
3	9.Oct.2007	064112	DELETE ASSEMBLY LOT NUMBER		A.KIMURA		N.OIRI
4	9.Oct.2024	059462	ADD LOT NUMBER IMPRINTING.		M.SHIMOMURA	Y.OKUYAMA	K.SHIMOJI

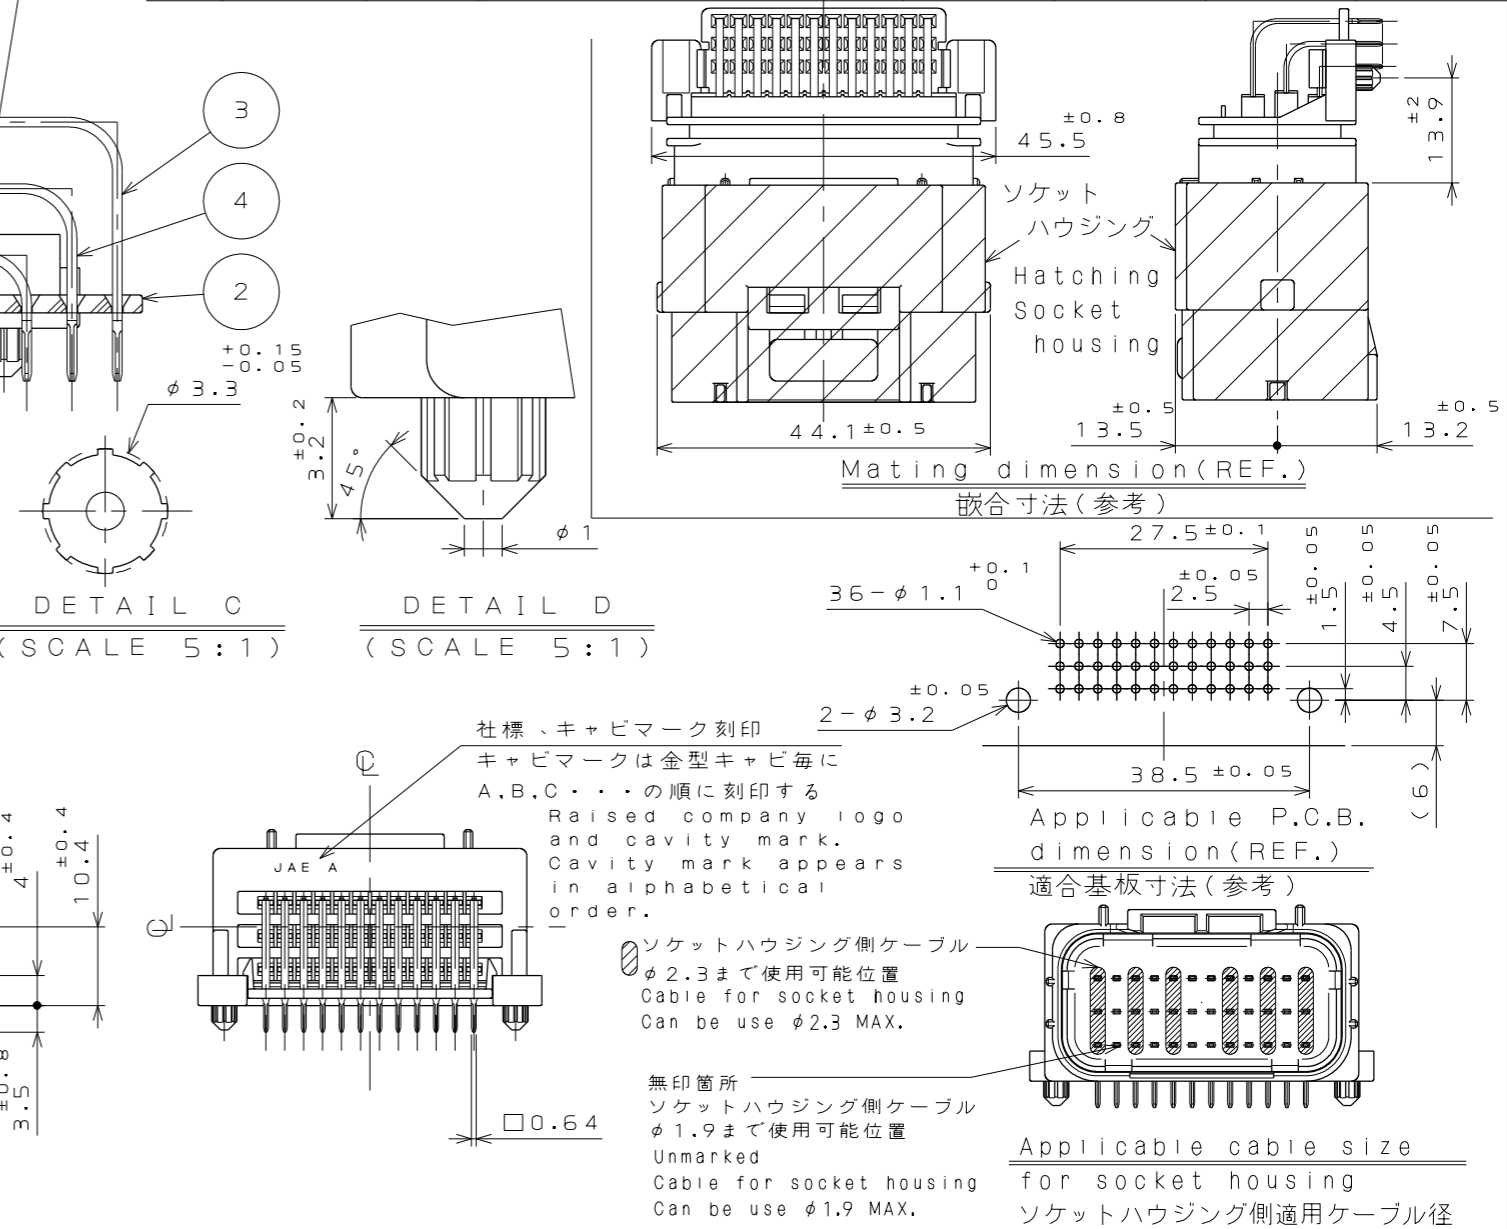

5	PIN CONTACT 2	12	BRASS	TIN PLATE	
4	PIN CONTACT 1	12	BRASS	TIN PLATE	
3	PIN CONTACT 5	12	BRASS	TIN PLATE	
2	LOCATOR	1	30%GF PBT (BLACK)		
1	PIN INSULATOR	1	30%GF PBT (ASH)		
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION) JACS-1728		第1版 (ORIGINAL DATE) 4.Jul.2006		尺度 (SCALE) 1:1	シリーズ (SERIES) MX23A
一般公差 (GENERAL TOLERANCE)		製図 DR.	T.HASEGAWA	名称 (TITLE) MX23A36NF6 MX23A 36 CONDUCTORS STANDARD PIN HEADEA KEY VARIATION	
寸法 (DIMENSION)		担当 CHK.	N.OIRI		
角度 (ANGLES)		査閲 APPD.			
. ±0.8 .X ±0.4 .XX ±0.1 .XXX ±		承認 APPD.	T.TOTANI		
		質量 (MASS)			
日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD. 図面番号 (DRAWING NO.) SJ105856					版数 (REV.) 4