
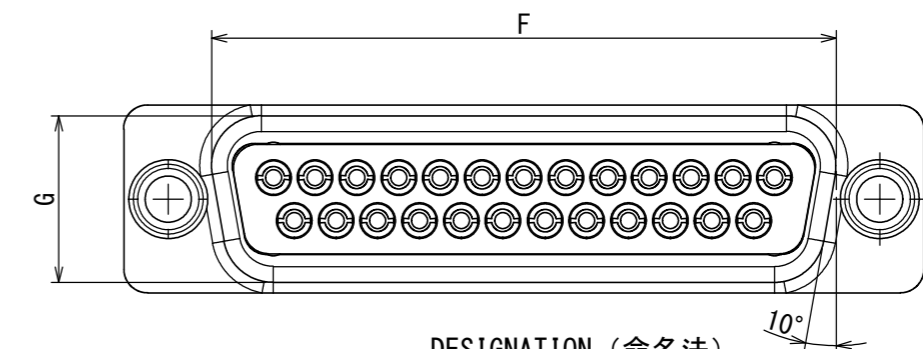


820310SJ

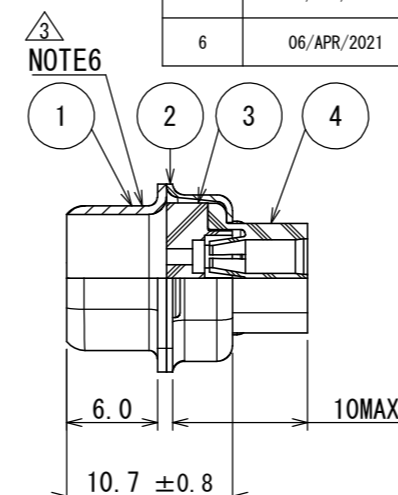

D * U - * * - E0 R

MODIFICATION CODE
特殊記号

NO CONTACTS (SEE NOTE 2)
コンタクト無し。

CONTACT TYPE
(S:SOCKET/P:PIN)
コンタクト区分
INSERT ARRANGEMENT
インサート配列

NOTE 6

1 2 3 4

6.1 10MAX

10.8 ± 0.8

SPECIFICATION (仕様)

耐電圧

絕緣抵抗

接触抵抗

NOTE1. MARK THE COMPANY NAME AND ABBREVIATED PART NUMBER
AT THE LOCATION IN THE DRAWING.



2. CONTACT ARE NOT SUPPLIED WITH CONNECTORS.
PLEASE DEMAND NECESSARY NUMBER OF CONTACTS ON ANOTHER ORDER.

3. FOR CONTACT ARRANGEMENT, SEE DWG. NO. SJ010210.

4. INSULATOR MATERIAL OF "UL STANDARDS" .
STANDARD OF BURNING : UL-94 V-0

5. FOR PANEL OUT-OUT DIMENSION, SEE DWN. NO. SJ013596.

6. LOT NUMBER AT THE LOCATION SHOWN IN THE DRAWING.

NO.		DESCRIPTION		QTY.	MATERIAL	FINISH	REMARKS	
仕様書 (SPECIFICATION)				第1版 (ORIGINAL DATE) 31/MAR/2005		尺度 (SCALE) 2:1	シリーズ (SERIES) Dsub	日本航空電子工業株式会社 JAE JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
				製図 DR.	—	名称 (TITLE) D*U-**-FOR		
一般公差 (GENERAL TOLERANCE)				担当 CHK.	Y. TAKAGI			
寸法 (DIMENSION)		角度 (ANGLES)		査閲 APPD.	—			
±0.8		×° ±		承認 APPD.	Y. KUBOTA	図面番号 (DRAWING NO.)		
× ±0.4		×°×' ±		シート (SHEET NO.) 1 OF 1		質量 (MASS)		SJ103082
×× ±0.13		単位 (UNIT) : mm						
××× ±								版数 (VER.) 6