

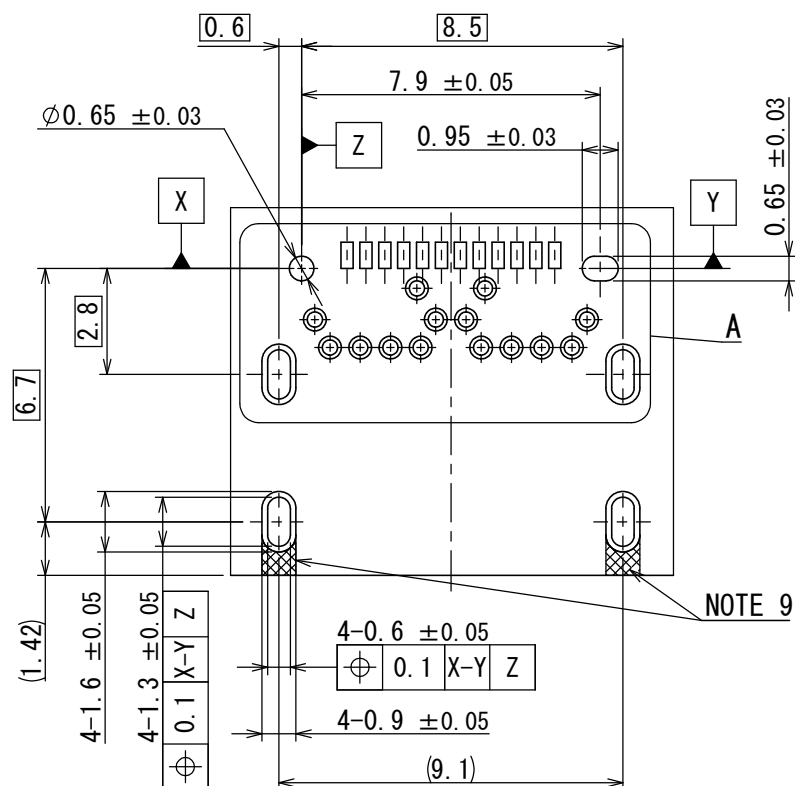
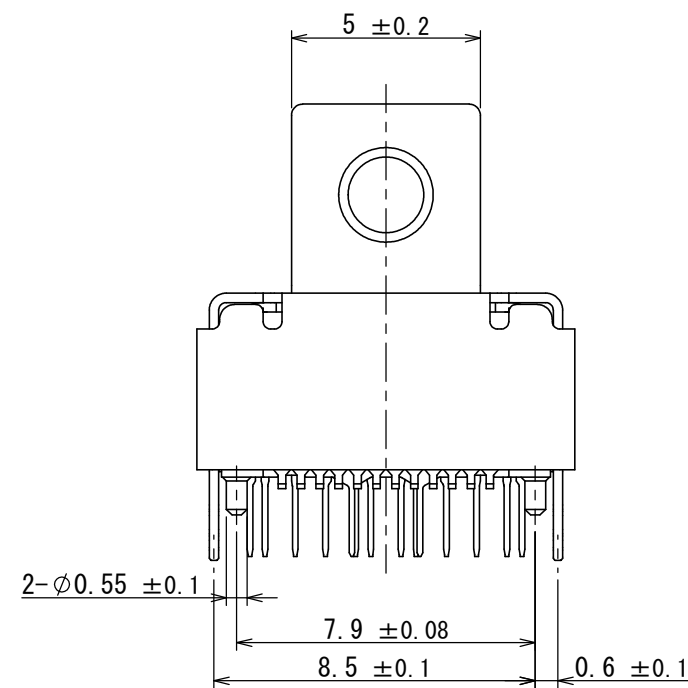
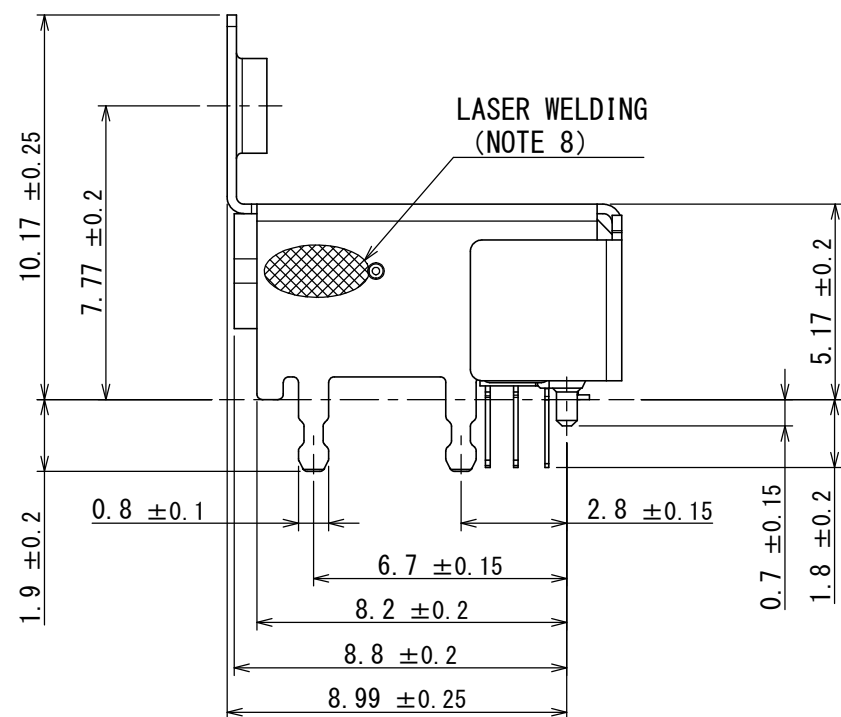
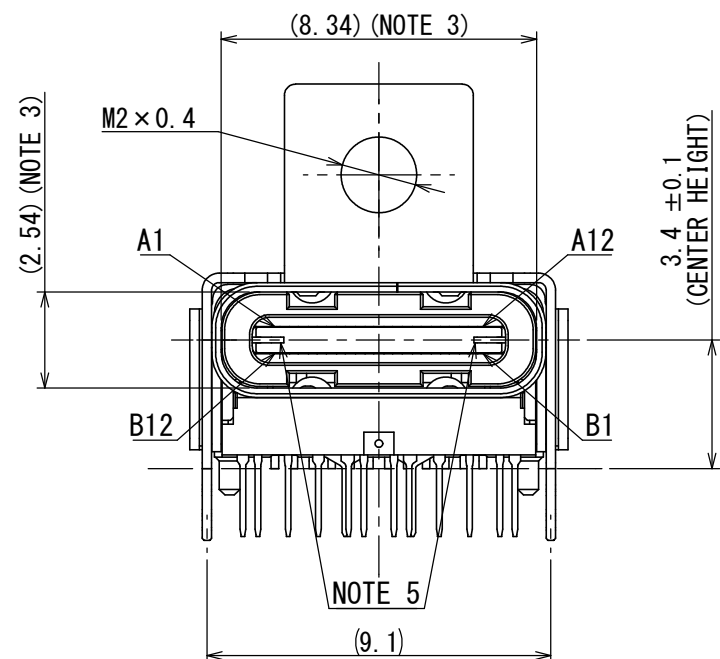
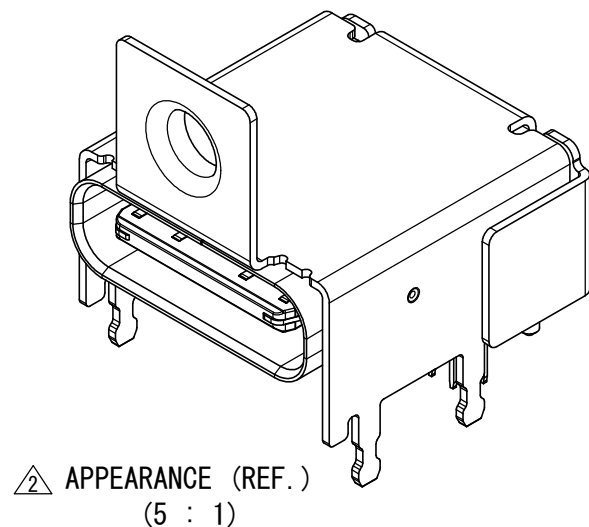
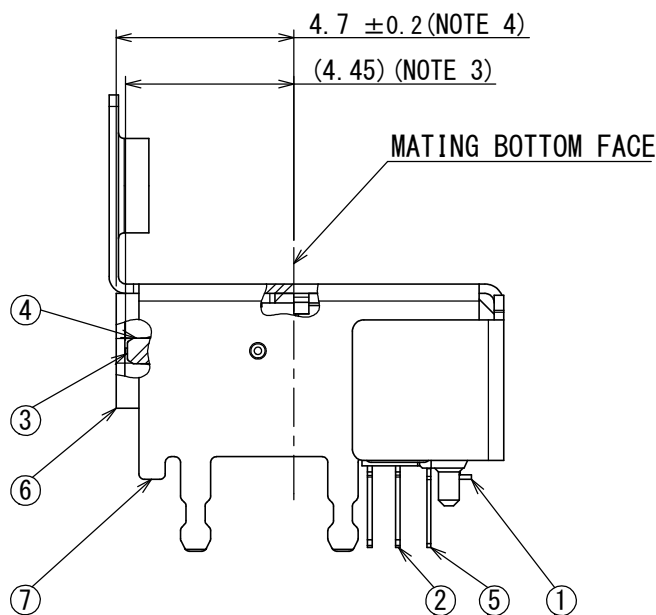
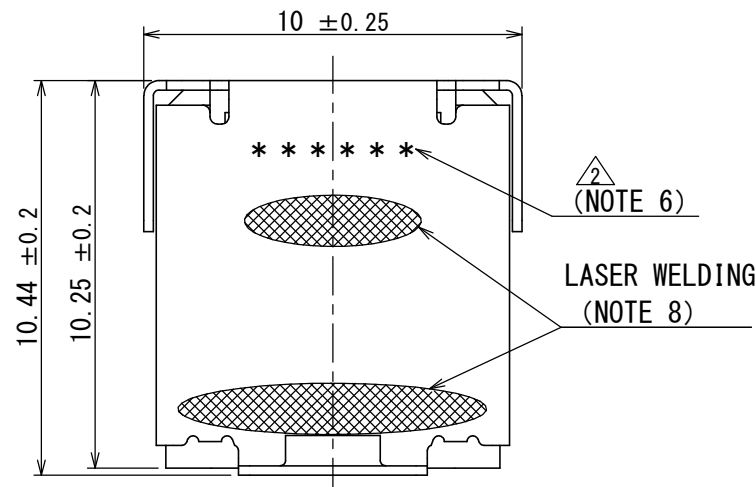



版数 VER.	年月日 DATE	図 NO.	変更内容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承認 APPD.
2	11/JUL/2018	025892	CORRECT AN ERROR AND ETC	—	J. OOSAKA	—	Y. SAITOU

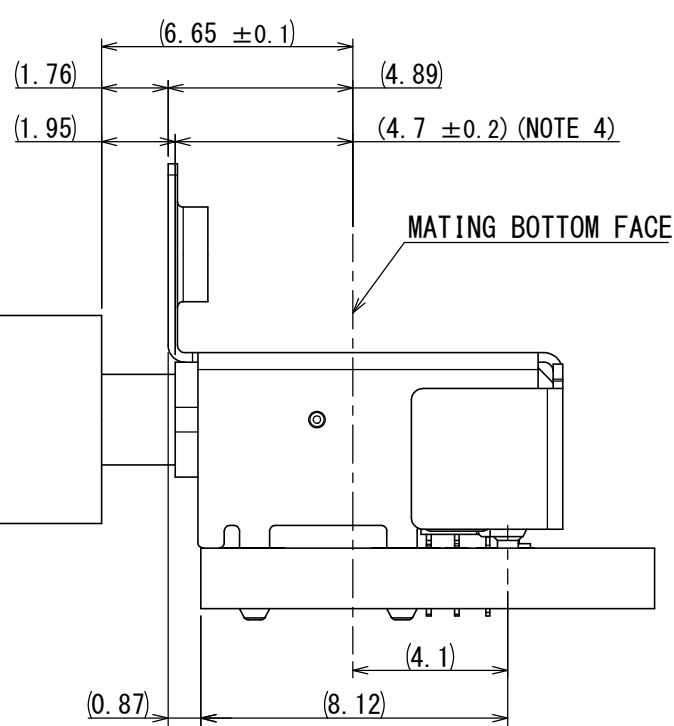


SURFACE VIEW FROM CONNECTOR MOUNTING SIDE
APPLICABLE P.C.B DIMENSION (REF.)
適合基板寸法 (参考)

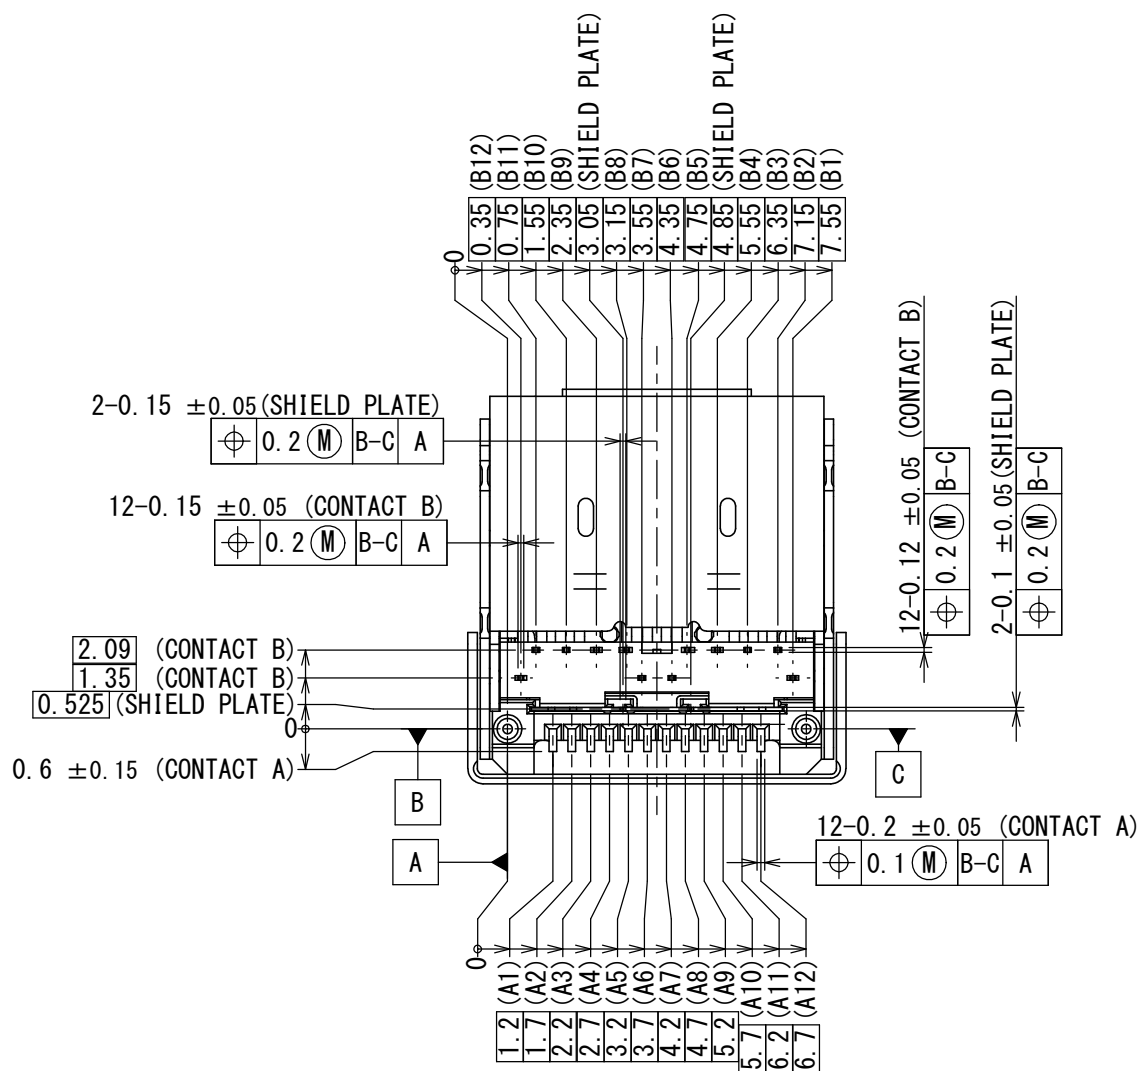

MATED CONDITION (REF.)
嵌合状態図 (参考)

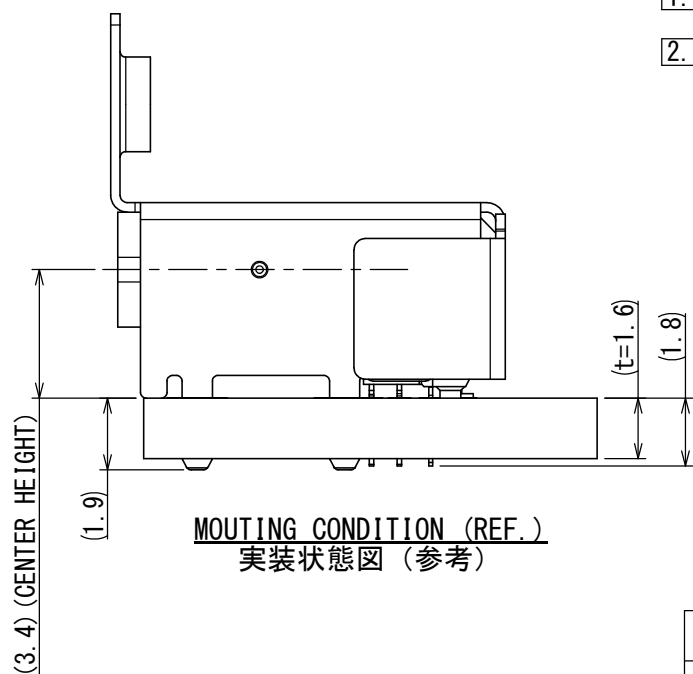

MOUNTING CONDITION (REF.)
実装状態図 (参考)

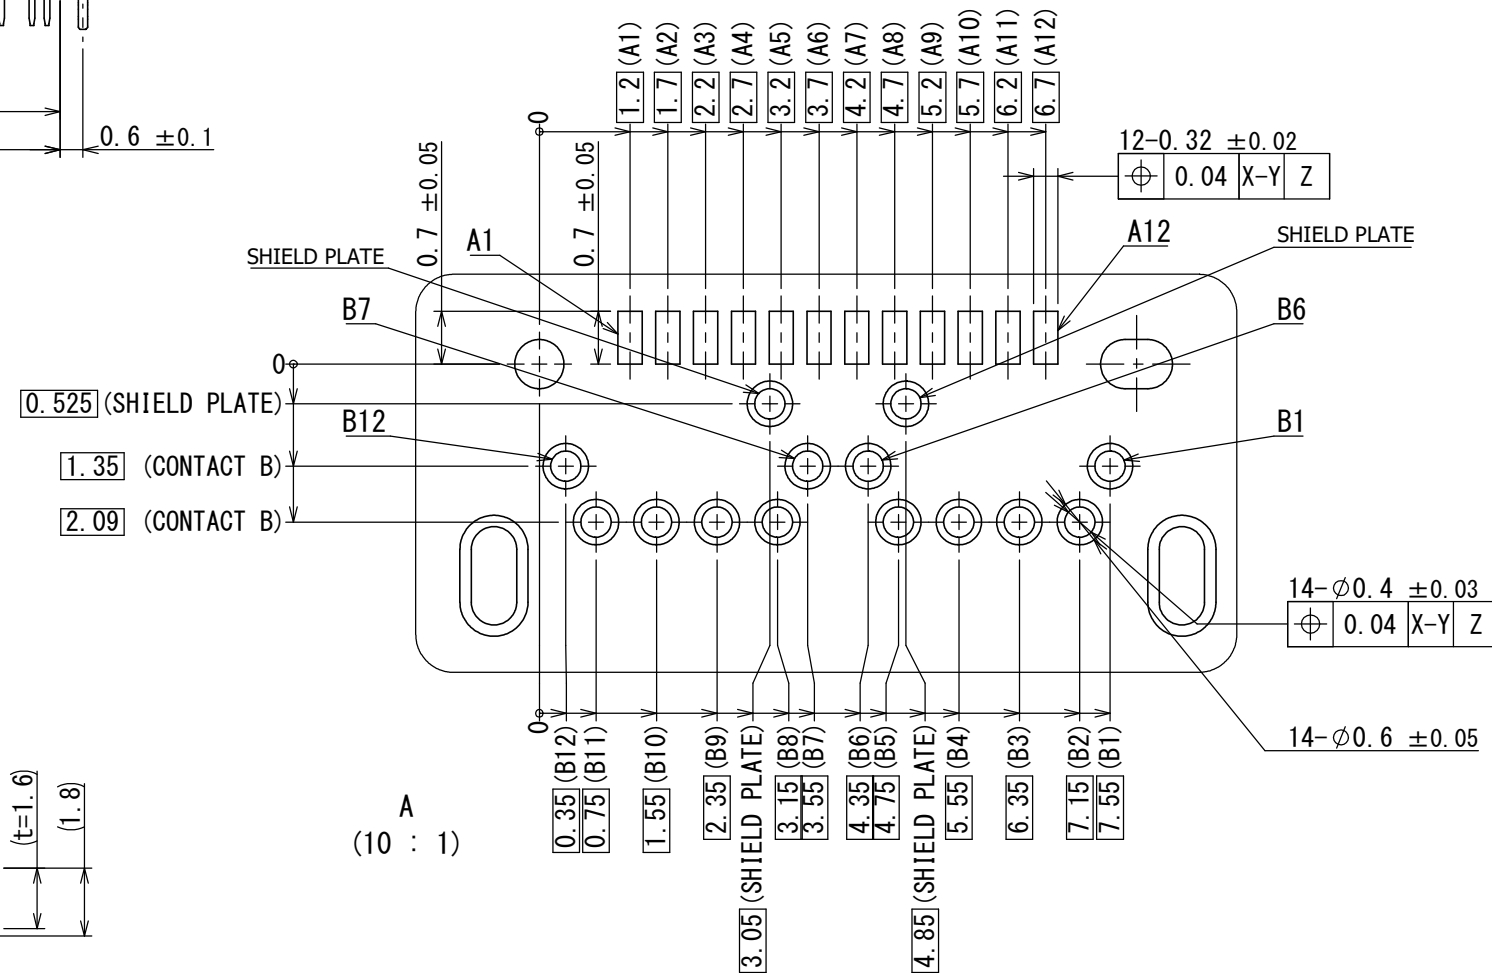

- NOTE 1. THIS PRODUCT IS HALOGEN-FREE PRODUCT.
NOTE 2. COPLANARITY OF SMT TERMINAL IS 0.1 MAX.
NOTE 3. MATING DIMENSIONS CONSIST OF "Universal Serial Bus Type-C Cable and Connector Specification Revision 1.2"
NOTE 4. THE SHELL LENGTH IS LESS THAN THE 6.2MM RECOMMENDED IN THE USB STANDARD.
THE SYSTEM IMPLEMENTER IS RESPONSIBLE FOR ACHIVING END PRODUCT RELIABILITY FOR THE MATED CONNECTOR CONDITION,
REFER TO "Universal Serial Bus Type-C Cable and Connector Specification Revision 1.2 Section 3.2.1 Note.7".
NOTE 5. METAL EXPOSED AREA SIZE COULD BE SLIGHTLY CHANGED BASED ON MOLDING PROCESS CONDITION IN EACH LOT, HOWEVER THIS WOULD NOT AFFECT CONNECTOR FUNCTION.
NOTE 6. LOT NUMBER IS MARKED AS INDICATED.

(EX) J Z 1 Q 1 1
YEAR MONTH DAY EQUIPMENT No.
(END OF ONE DIGIT AT CHRISTIAN ERA)
(JAN. TO SEP.: 1 TO 9, OCT.: 0, NOV.: X, DEC.: Y)
(TWO-DIGITS NUMBER)
(NUMBER OR ALPHABET)

- NOTE 7. PIN ASSIGNMENT (FRONT VIEW)
NOTE 8. LASER WELD POINTS MAY BE DISCOLORED.
NOTE 9. NO PCB ROUTING ALLOWED IN THIS AREA.


NOTE 7

Pin No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1-	V _{BUS}	CC1	D+	D-	SBU1	V _{BUS}	RX2-	RX2+	GND
Pin No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
	GND	RX1+	RX1-	V _{BUS}	SBU2	D-	D+	CC2	V _{BUS}	TX2-	TX2+	GND

符号 NO.	名称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
7	BRACKET	1	STAINLESS STEEL	NICKEL PLATING	NICKEL : 0.5 μm MIN.
6	SHELL	1	STAINLESS STEEL	—	—
5	SHIELD PLATE	1	STAINLESS STEEL	NICKEL PLATING	—
4	INSULATOR	1	HEAT RESISTANCE PLASTIC	—	COLOR : BLACK
3	MID PLATE	1	STAINLESS STEEL	—	—
2	CONTACT B	12	COPPER ALLOY	CONTACT AREA : GOLD OVER NICKEL	CONTACT AREA : NICKEL : 1.0 μm MIN.
1	CONTACT A	12	COPPER ALLOY	SOLDER TAILS : GOLD FLASH OVER NICKEL	GOLD : 0.1 μm MIN.

仕様書 (SPECIFICATION) JACS-30361 JABL-30361-1	第1版 (ORIGINAL DATE) 10/APR/2018	尺度 (SCALE) 5:1	シリーズ (SERIES) DX07	日本航空電子工業株式会社
一般公差 (GENERAL TOLERANCE)	製図 DR.	名称 (TITLE) DX07S024XJ4	References	
寸法 (DIMENSION).	担当 CHK.	査閲 APPD.	JAE	
角度 (ANGLES)	承認 APPD.	承認 APPD.	Y. SAITOU	
単位 (UNIT) : mm	質量 (MASS)		図面番号 (DRAWING NO.) SJ119851	
				版数 (VER.) 2

版数 VER.	年月日 DATE	CN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承 認 APPD.
------------	-------------	--------	------------------------	------------	-------------	--------------	--------------



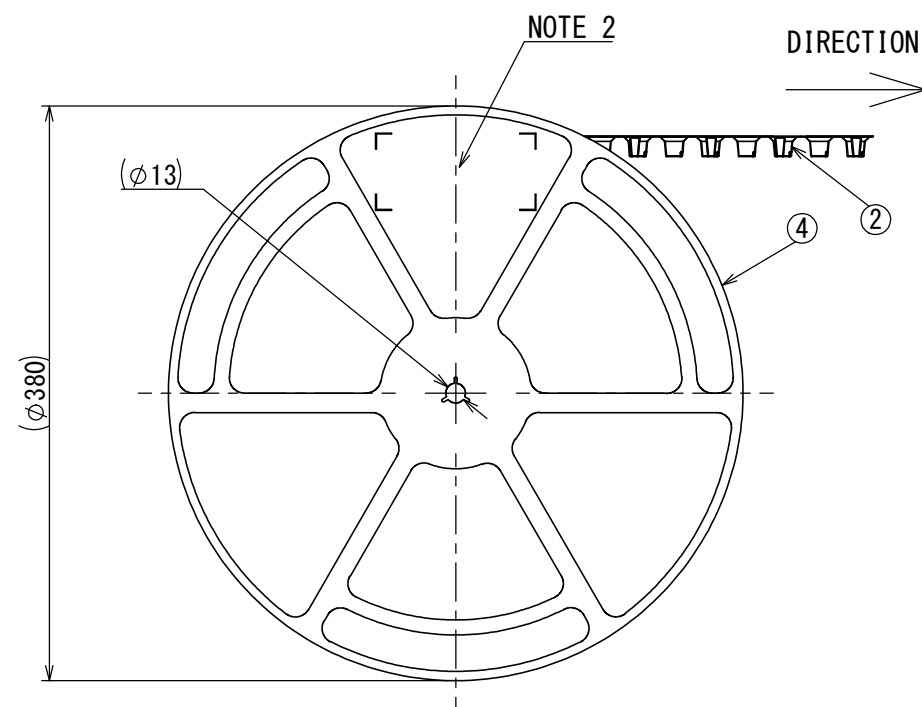


NOTE 1. SUFFIX "R250" OF PART NUMBER "DX07S024XJ4R250" INDICATES 250PCS IN REEL.
NOTE 2. THE LABEL IN WHICH DESCRIPTION ,QTY, LOT NO,EMBOSS CODE AS INDICATED.
NOTE 3. REFER TO THE DRAWING "SJ119851(DX07S024XJ4)"FOR THE CONNECTOR DIMENSIONS.
NOTE 4. REEL FORM MAY DIFFER FROM THE DRAWING.


R-Pb (Pb-Free)			
台灣航空電子股份有限公司 MADE IN *****			
品名	DX07S024XJ4R250		
收納数	250 個入	製造年月日	
備考	TB3224		

COUNTRY OF MANUFACTURE

32:TAPE WIDTH / 24:FEED PITCH / NUMBER OF CONNTECTOR

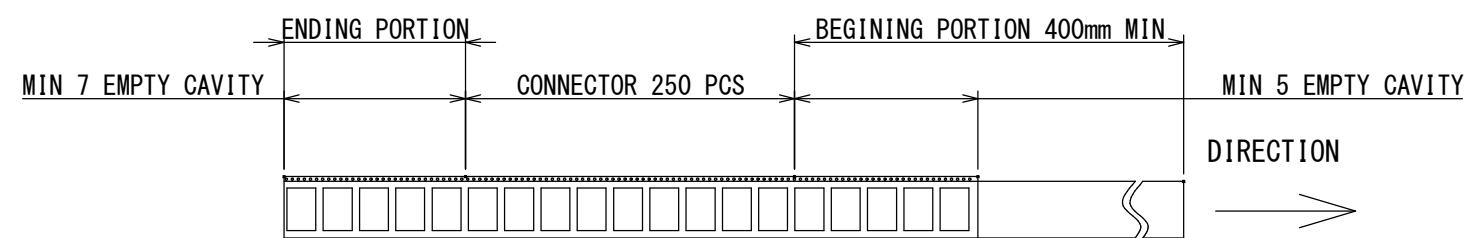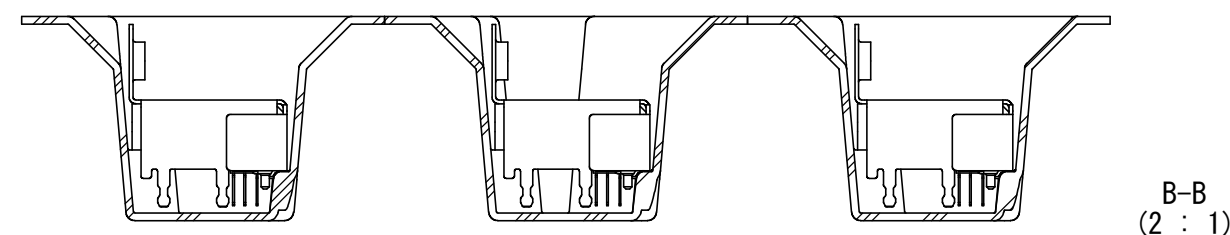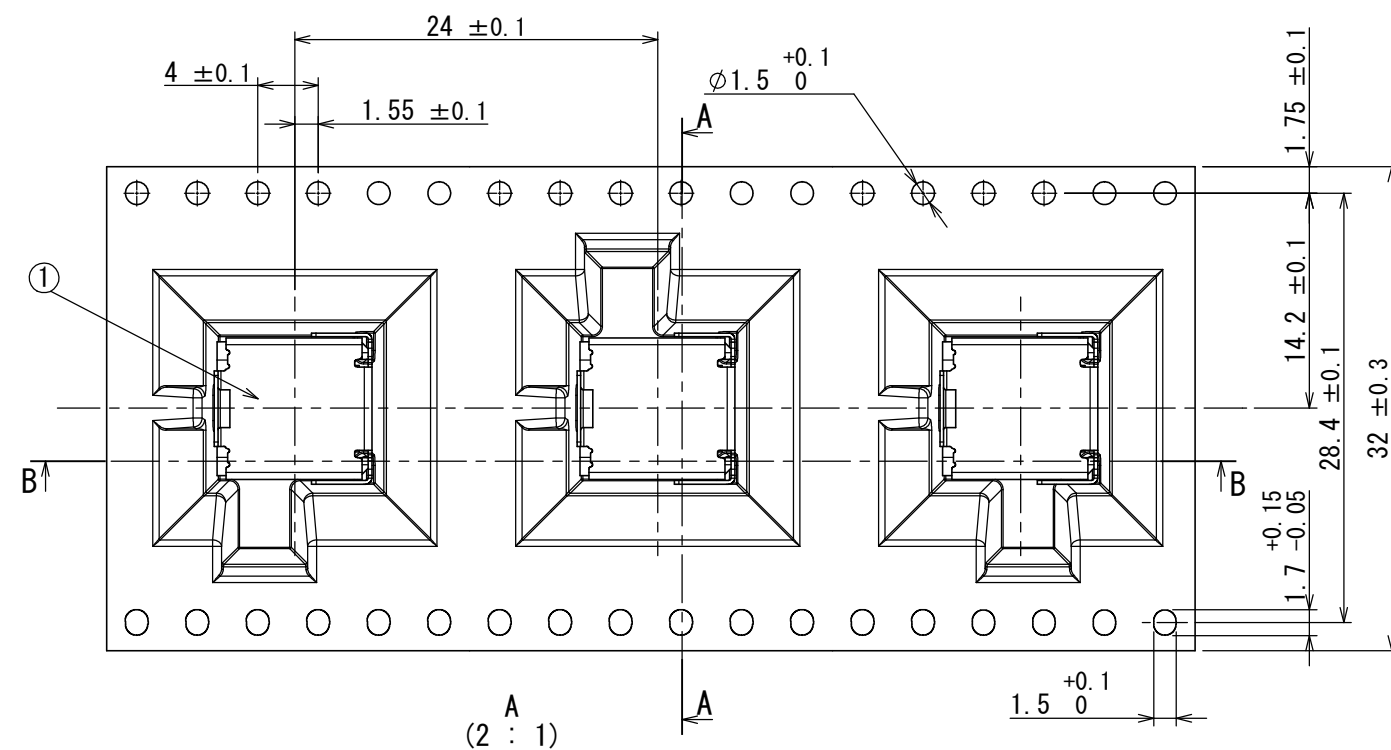

4	REEL	1	PS	-	-
3	COVER TAPE	1	PET	-	-
2	CARRIER TAPE	1	PS	-	-
1	DX07S024XJ4	250		-	SJ119851
符号 NO.	名 称 DESCRIPTION	個 数 QTY	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

NO.		DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS	SIZE A3	
仕様書 (SPECIFICATION) JACS-30361		第1版 (ORIGINAL DATE) 16/APR/2018		尺度 (SCALE) 1:5	シリーズ (SERIES) DX07	日本航空電子工業株式会社		
		製図 DR.	—	名称 (TITLE) DX07S024XJ4R250				 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
一般公差 (GENERAL TOLERANCE)		担当 CHK.	J. OOSAKA			図面番号 (DRAWING NO.) SJ119852		
寸法 (DIMENSION)	角度 (ANGLES)	査閲 APPD.	—					
		承認 APPD.	Y. SAITOU					
	±0.8	×° ±						
	× ±0.4	×°×' ±						
×× ±0.1		単位 (UNIT) : mm					版数 (VER.) 1	
××× ±								