

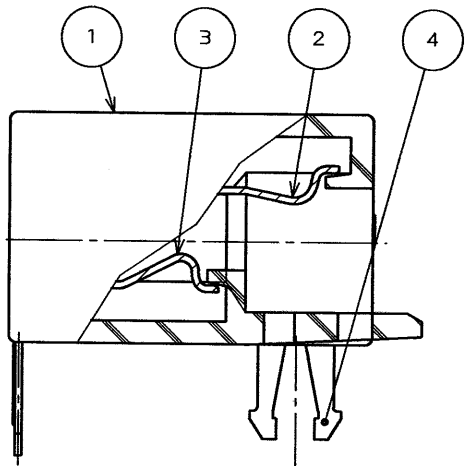
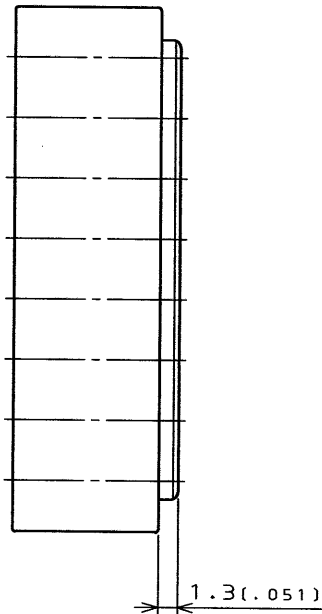
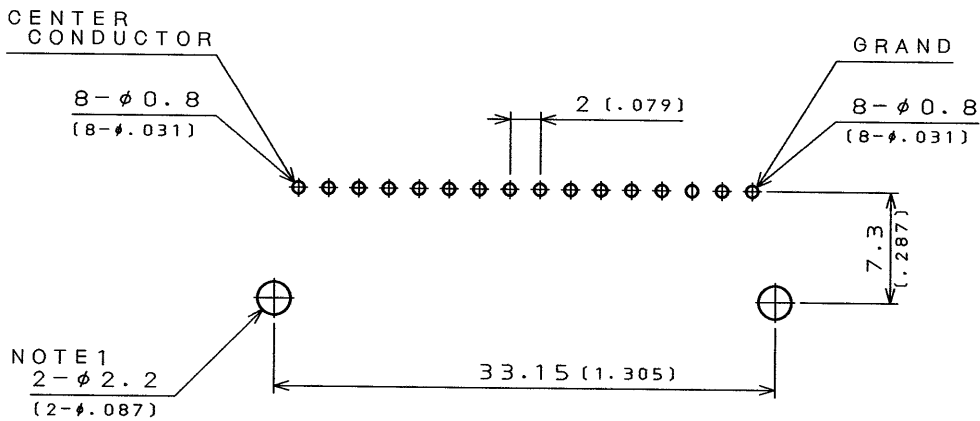
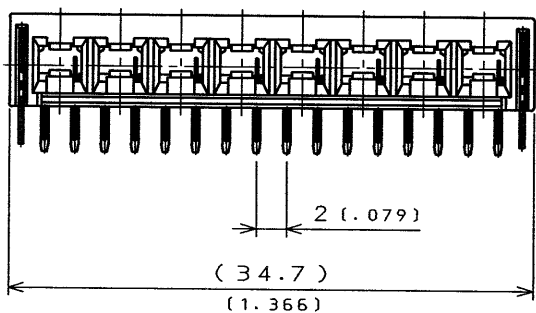


SJ028205-E
 DWG. NO.

SYM.	DCN NO.	DESCRIPTION	DATE	DRAWN	CHECKED	APP'D	APP'D

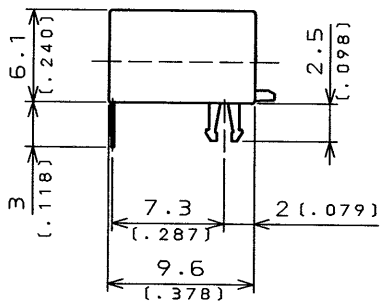

DETAIL
 (SCALE 5/1)

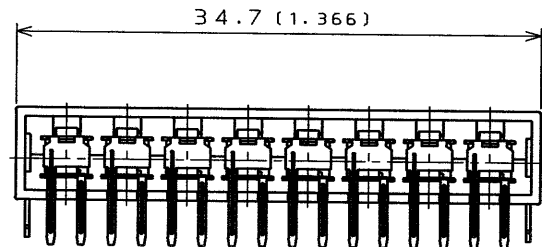

P.C.B. HOLD PATTERNS
 P.C.B. THICKNESS RECOMMENDED: 1.6mm MAX

DESIGNATION

KD10-RRP8-F-0

SOLDER HEAT

CONTACT TYPE (M: MALE, F: FEMALE)

No. OF CONTACTS

CONNECTOR TYPE: RIGHT ANGLE RESEPTACLE

SERIES


NOTE 1, PLEASE CONNECT HOLD DOWN WITH GROUND.

4	HOLDDOWN	2	COPPER ALLOY	TIN OVER NICKEL	
3	CENTER CONTACT	8	COPPER ALLOY	GOLD OVER NICKEL	
2	OUTER CONTACT	8	COPPER ALLOY	GOLD OVER NICKEL	
1	INSULATOR	1	6-6Ny		
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARKS

REFERENCE DOCUMENT		DATE	SCALE	DRW. NO.	Q'TY
JACS2034-E		30. Jun. '94			
MATERIAL		DRAWN	JAE-CONNECTOR.COM Reference Only KD10-RRP8-F-0 SERIES KD10		
		T. MIYASHITA			
TREATMENT		CHECKED			
		T. MIYASHITA			
FINISH		APP'D	MUSASHINO, AKISHIMA-SHI TOKYO, JAPAN DWG. NO. SJ028205-E		
		T. Suzuki			

DIMENSIONS ARE IN MILLIMETERS	
TOLERANCES ON: (INCHES)	
DIMENSION	ANGLES
. \pm 0.8	X° \pm —
.X \pm 0.4	X°X' \pm —
.XX \pm 0.1	CONCENTRICITY
.XXX \pm —	WITHIN T.I.R.

DCF-116A



CSP-94-140-52342

SIZE A3