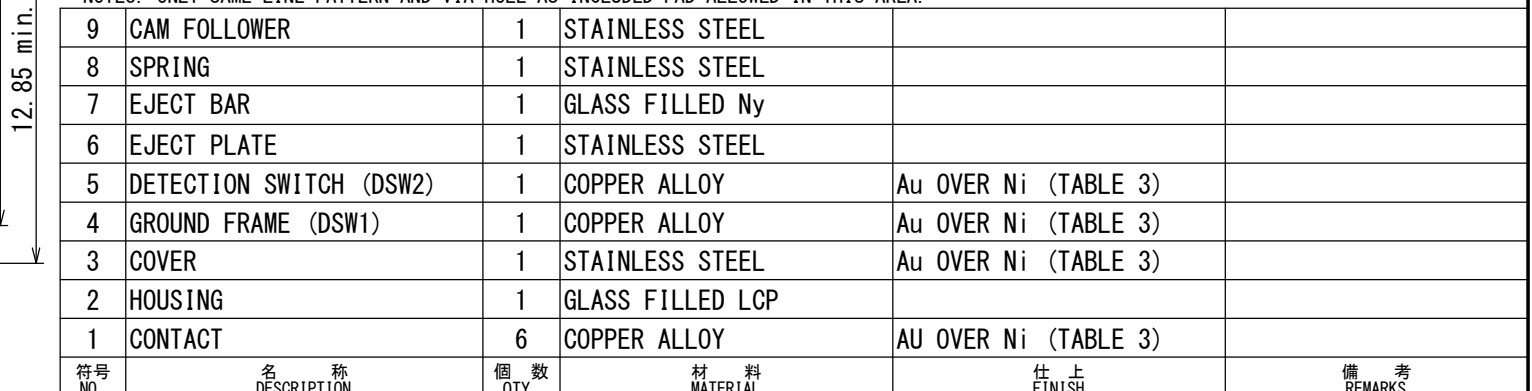


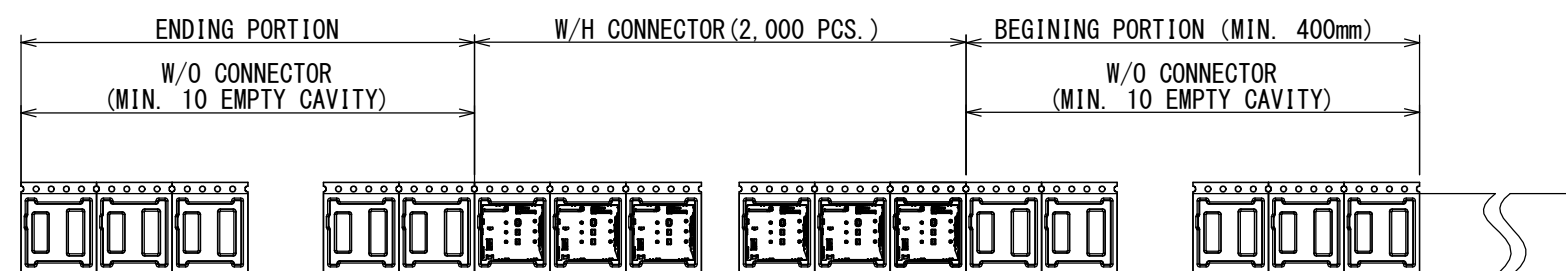
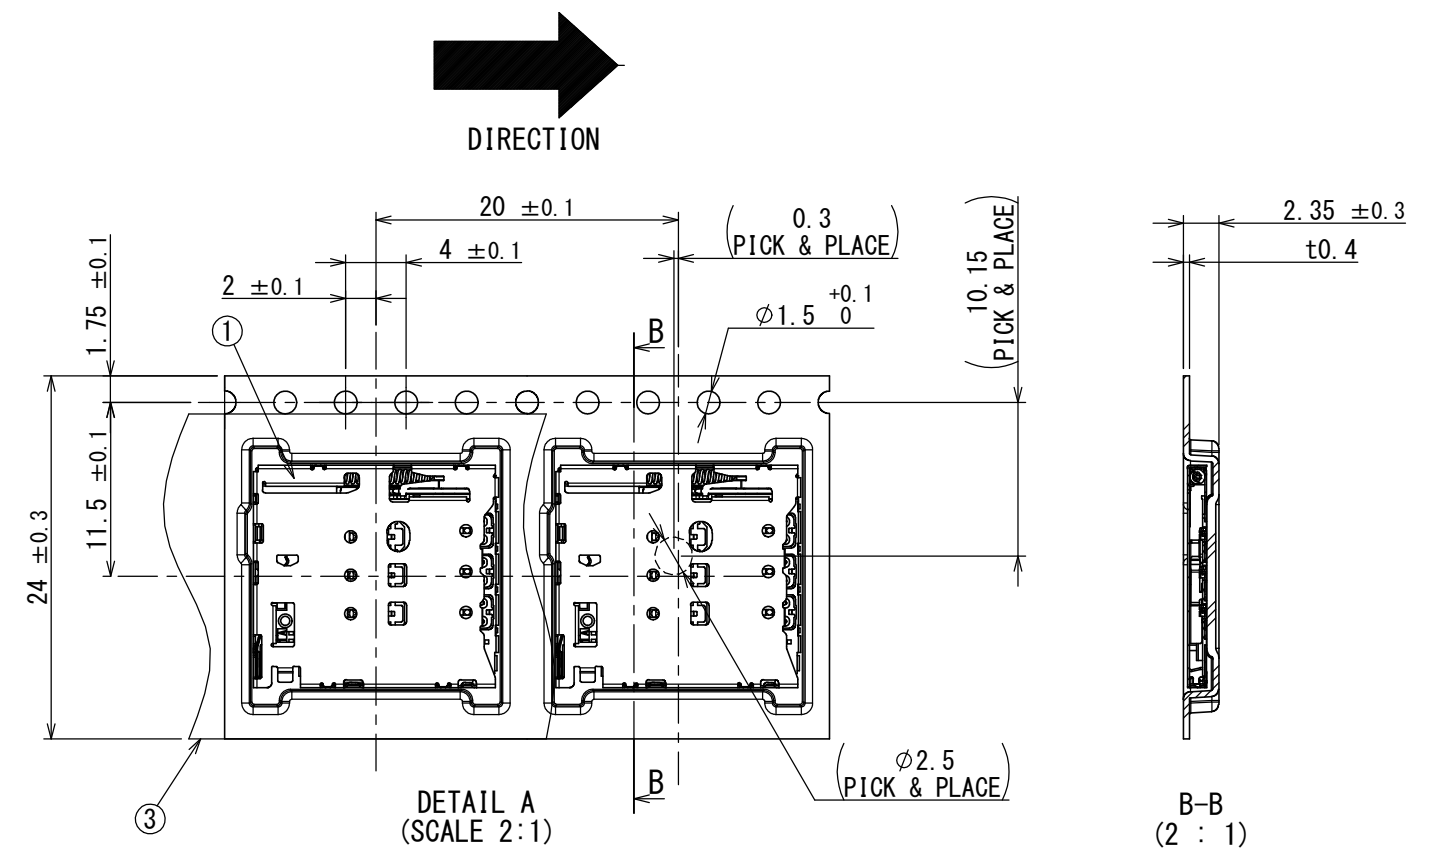
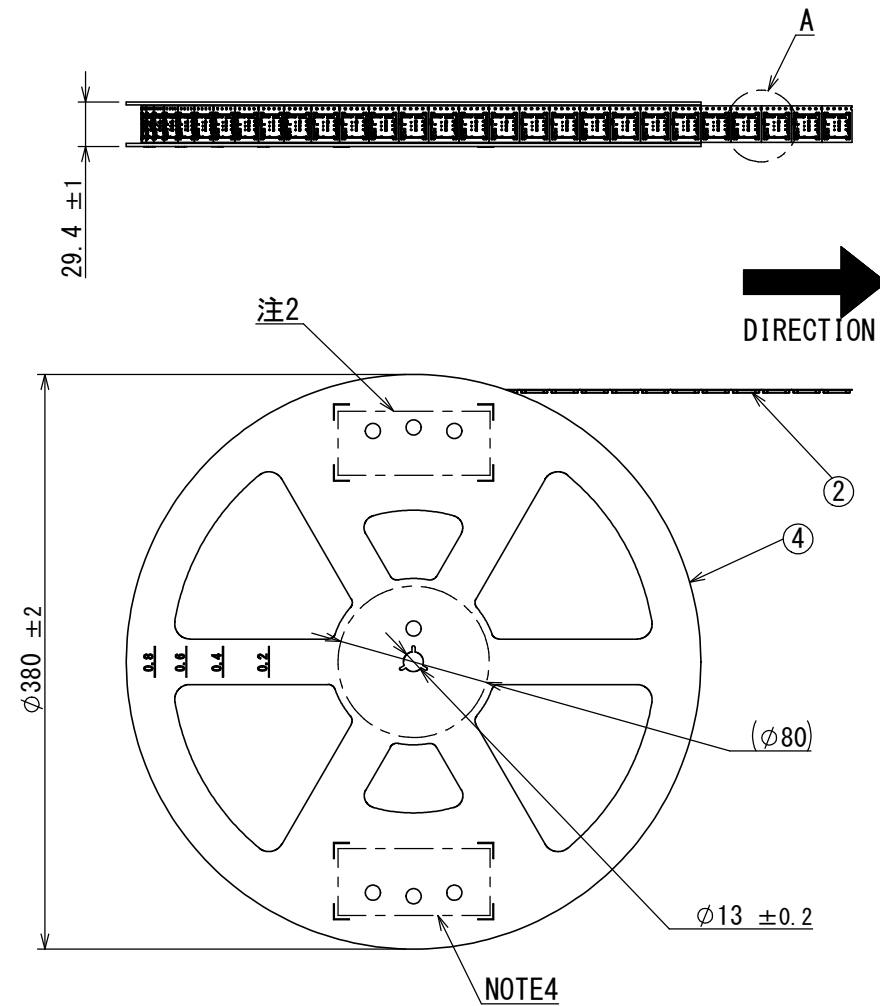


PART No.	PART NAME	BASE PLATING		TOP PLATING	
		CONTACT AREA	TERMINAL AREA	CONTACT AREA	TERMINAL AREA
①	CONTACT	Ni (2~6μm)	Ni (1~6μm)	Au (0.3μm min.)	Au (0.03μm min.)
③	COVER	-	Ni (0.5~6μm)	-	
④	GROUND FRAME (DSW1)	Ni (1~6μm)		Au (0.1μm min.)	
⑤	DETECTION SWITCH (DSW2)				



NO.		DESCRIPTION		DATE	MATERIAL	FINISH		REMARKS
仕様書 (SPECIFICATION)				第1版 (ORIGINAL DATE)		シリーズ (SERIES)		 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
JACS-11101				25/SEP/2015		SF56		
製図 DR.				-		名称 (TITLE)		
担当 CHK.				K. MIKAWA		SF56K006VBA		
寸法 (DIMENSION)		角度 (ANGLES)		査閲 APPD.		-		
± 0.8		×° ±		承認 APPD.		M. SHIMADA		
× ± 0.4		×°×' ±						
×× ± 0.1								
××× ±		単位 (UNIT) : mm				質量 (MASS)		図面番号 (DRAWING NO.)
						-		SJ116250




NOTE1. SUFFIX "R2000" OF THE PART NUMBER INDICATES THAT 2000 PCS. OF SF56K006VBA CONNECTORS ARE ACCOMODATED IN ONE REEL.

2. THE LABEL IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN, AND DESCRIPTION, QTY, LOT NO, EMOSS CODE ARE SHOWN.
3. REFER TO THE DRAWING, SJ116250 (SF56K006VBA) FOR THE DIMENSION OF THE CONNECTOR.
4. IF THERE IS ANOTHER ASSIGNED LABEL, THE LABEL IS TO BE ATTACHED. (REFER TO JACS)

NOTE2.
DESCRIPTION:SF56K006VBAR2000
QTY :2000
LOT NO :DDMMYY-*(*:REEL No.)
EMBOSS CODE:TB24 20

20: PITCH
24: TAPE WIDTH

4	REEL	1	PLASTIC	—	
3	COVER TAPE	1	POLYESTER	—	
2	CARRIER TAPE	1	PS	—	
1	CONNECTOR	2000	—	—	SJ116250 (SF56K006VBA)
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION) JACS-111101		第1版 (ORIGINAL DATE) 28/AUG/2015		尺度 (SCALE) 1:5	シリーズ (SERIES) SF56	日本航空電子工業株式会社	 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	図面番号 (DRAWING NO.) SJ116251	版数 (VER.) 1
一般公差 (GENERAL TOLERANCE)		製図 DR.		名称 (TITLE) SF56K006VBAR2000					
寸法 (DIMENSION)	角度 (ANGLES)	担当 CHK.	K. MIKAWA						
±0.8	×° ±	査閲 APPD.	-						
× ±0.4	×°×' ±	承認 APPD.	M. SHIMADA						
×× ±0.1									
××× ±									
	単位 (UNIT) : mm			質量 (MASS) -	