




USB 2.0 Compatible Micro Connectors


DX4 Series

CONNECTOR
MB-0187-3
December 2014

RoHS Compliant

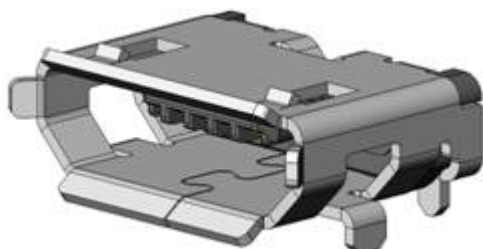

On-board Type

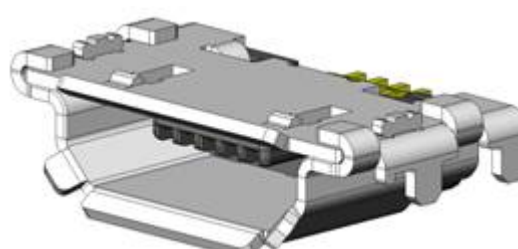


Mid-mount Type

The DX4 Series is a set of connectors compatible with the Micro-USB type USB 2.0 for small devices standardized by the USB Implementers Forum, Inc.

Features

- Compatible with Universal Serial Bus Micro-USB Cables and Connectors Specification, Revision 1.01.
- Connector type: USB 2.0 compatible, Micro types
- Au plating over Pd-Ni alloy is used for mating cycle durability and long product life.
- Superior rigidity with high-strength stainless steel shell.
- Available in a variety of versions to suit diverse device configurations.
- Two-piece shell structure for mid-mount type to prevent contact failure due to flux scattering during reflow.
- Available in reinforced type, with reinforcement plate set in mating area to prevent damage from plug caused by misaligned mating. (Refer to drawing below)

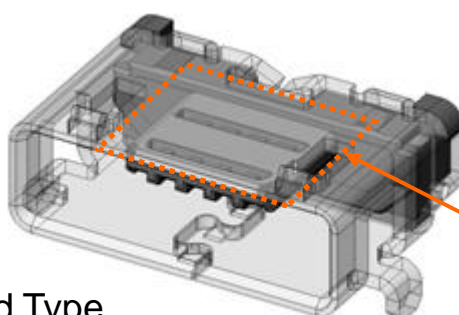

Reinforcement plate
of mating area

Mating Area Reinforced Type

*In the above drawing the shell is transparent for illustration purposes to show the reinforcement plate.

General Specifications

- | | |
|--|-------------------------------------|
| ■ No. of Contacts: 5 positions | ■ Rated Current: DC1.8A (Vbus, GND) |
| ■ Contact Resistance: | Others DC0.5A |
| 30m ohm max. (initial) | ■ Rated Voltage: AC30Vrms |
| ■ Dielectric Withstanding Voltage: | ■ Durability: 10,000 mating cycles |
| AC500Vrms per minute | ■ Operating temperature: |
| ■ Insulation Resistance: 1000M ohm (initial) | -30 Deg. C to +80 Deg. C |

Materials and Finishes

Component	Material and Finish
Insulator	Synthetic Resin
Contact	Copper alloy / Contact area: Au flash plating over Pd-Ni alloy over Ni Terminal area: Au flash plating over Ni
Shell	Stainless Steel / Sn plating over Ni

*For more information please refer to individual product drawings.

Ordering Information

DX4 R 0 05 J J 2 R1800

Series

DX4: USB2.0 Micro

R: Receptacle

Modification Code: #1

No. of Contacts: 5 pos.

Reel: 1800 pcs. / reel

Modification Code: #2

Plating Specification

J: Contact area: Au flash over Pd-Ni alloy over Ni

Board Connection Type (Shell area)


J: Through-hole type, H: Hold-down type

Micro-USB Connector Type	Part Number	SJ Drawing	Specification	Mounting Type		Mating Taper	Mating Area Reinforcement Plate			
Type B	DX4R005JJ2 (Individual Unit) DX4R005JJ2R1800 (Reel Unit)	SJ110578 SJ110579	JACS-30162	On-board	Standard	Yes	No (Standard Type)			
	DX4R005HJ5 (Individual Unit) DX4R005HJ5R2000 (Reel Unit)	SJ111770 SJ111771	JACS-30185			No				
	DX4R005JJ6 (Individual Unit) DX4R005JJ6R1500 (Reel Unit)	SJ112420 SJ112421	JACS-30251	Yes						
	DX4R005JJ7 (Individual Unit) DX4R005JJ7R1500 (Reel Unit)	SJ112422 SJ112423	JACS-30252	No						
	DX4RN05JJ3 (Individual Unit) DX4RN05JJ3R2000 (Reel Unit)	SJ112800 SJ112801	JACS-30257	No						
	DX4R105JJC (Individual Unit) DX4R105JJCR1800 (Reel Unit)	SJ113218 SJ113219	JACS-30281	Reverse			Yes			
	Type AB	DX4R205JJA (Individual Unit) DX4R205JJAR1800 (Reel Unit)	SJ112925 SJ112926	JACS-30267			On-board	Standard	No	Yes (Mating Area Reinforced Type)
		DX4R305JJB (Individual Unit) DX4R305JJBR1800 (Reel Unit)	SJ112927 SJ112928	JACS-30268				Reverse		
		DX4R205JJ8 (Individual Unit) DX4R205JJ8R2000 (Reel Unit)	SJ112802 SJ112803	JACS-30258			Mid-mount	Standard	Yes	
		DX4R205JJ9 (Individual Unit) DX4R205JJ9R2000 (Reel Unit)	SJ112804 SJ112805	JACS-30259					No	

Note: Please place orders in reel units.


Standard Type (Micro-B): DX4R005JJ2

Unit: mm

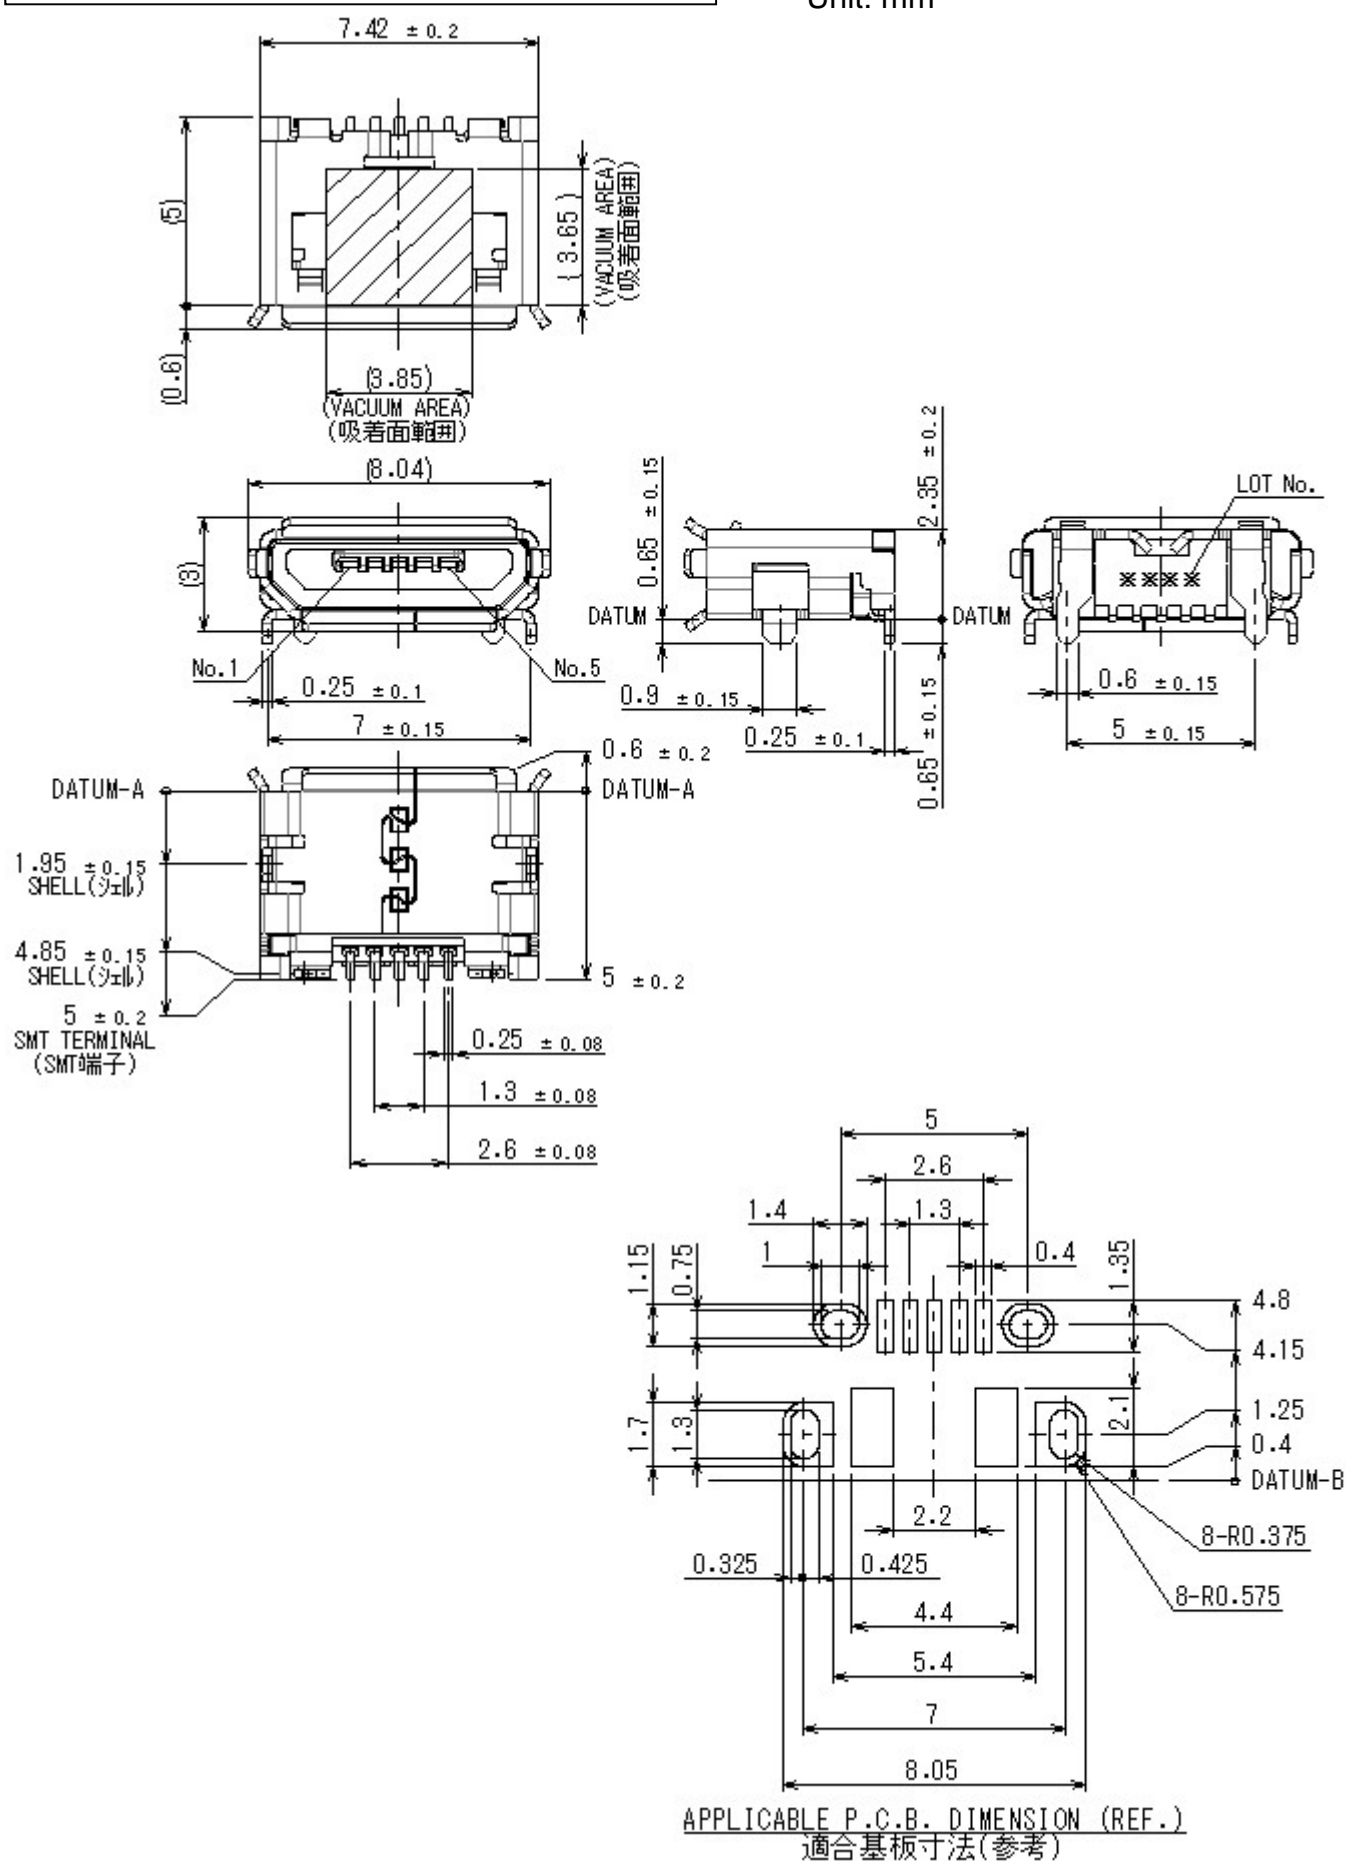


Standard Type (Micro-B): DX4R005HJ5

Unit: mm

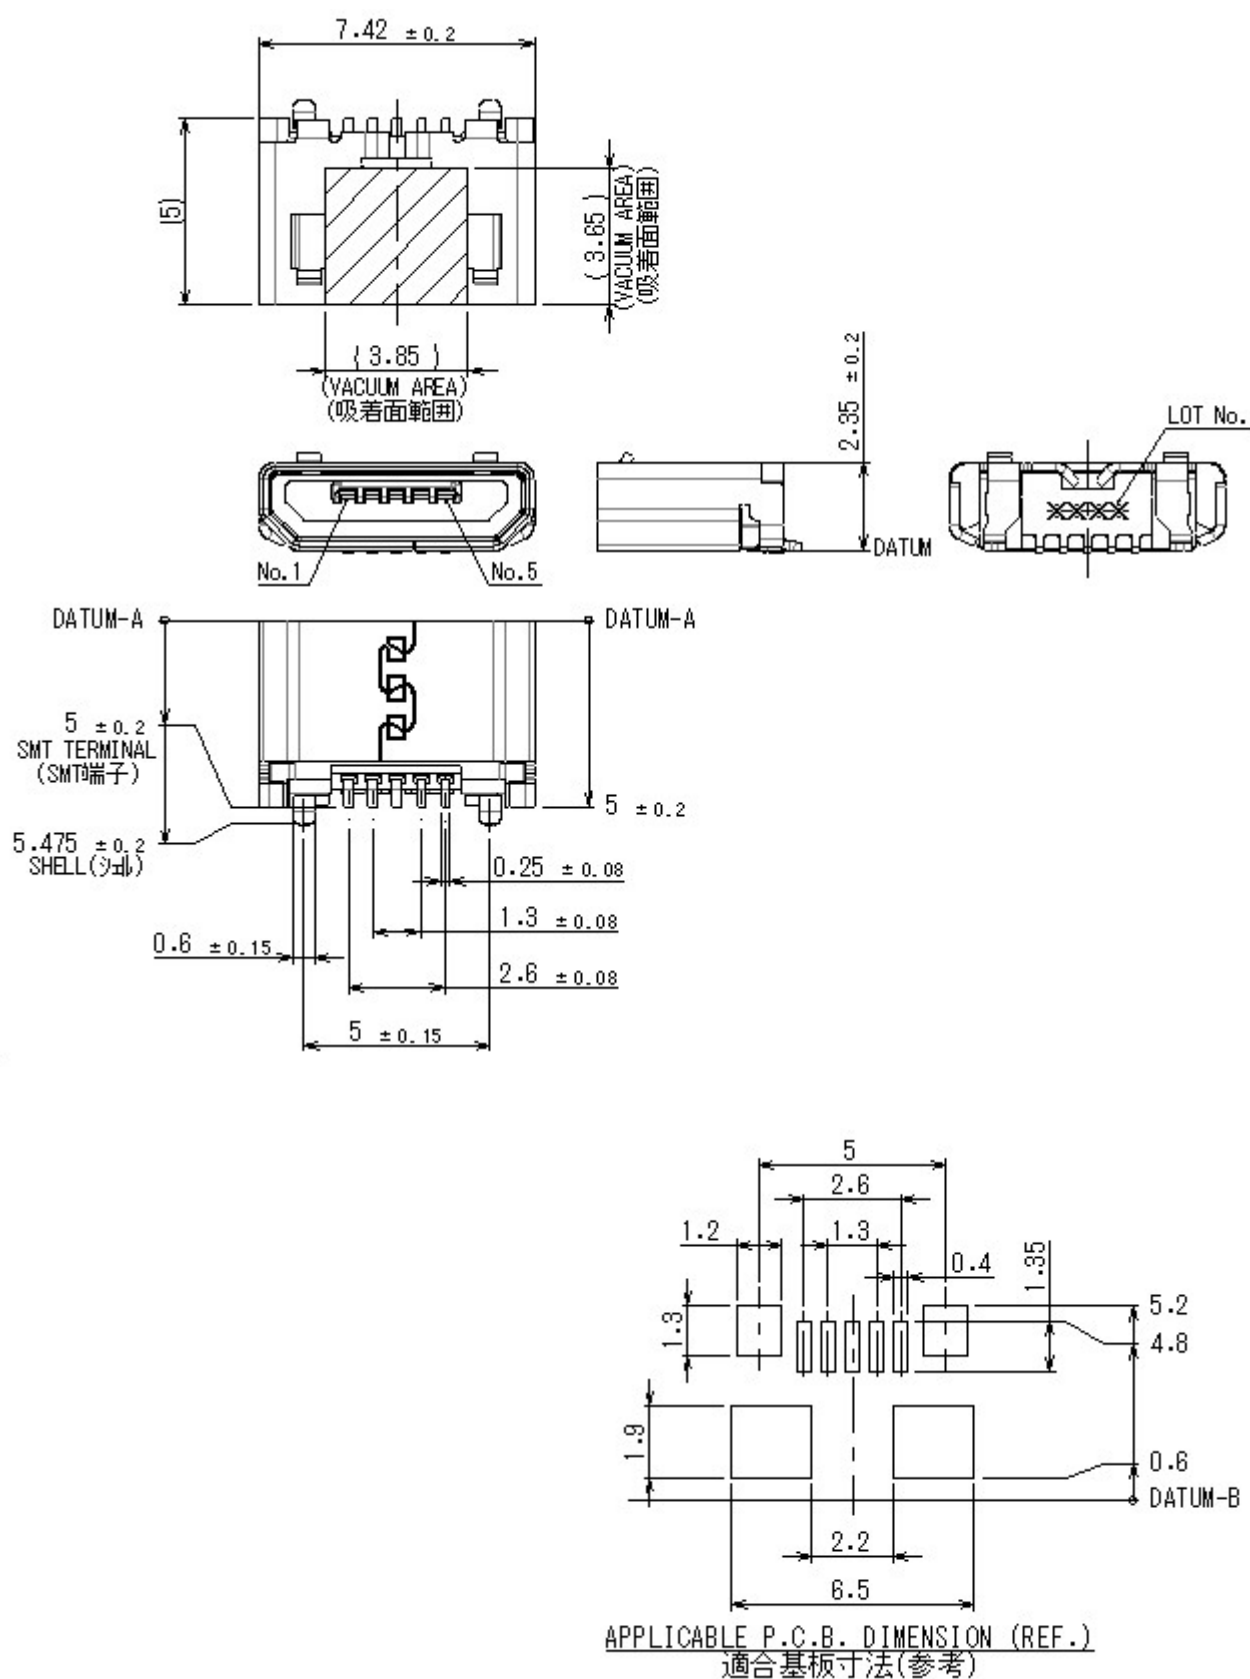



Mating Area Reinforced Type (Micro-B): DX4RN05JJ3

Unit: mm

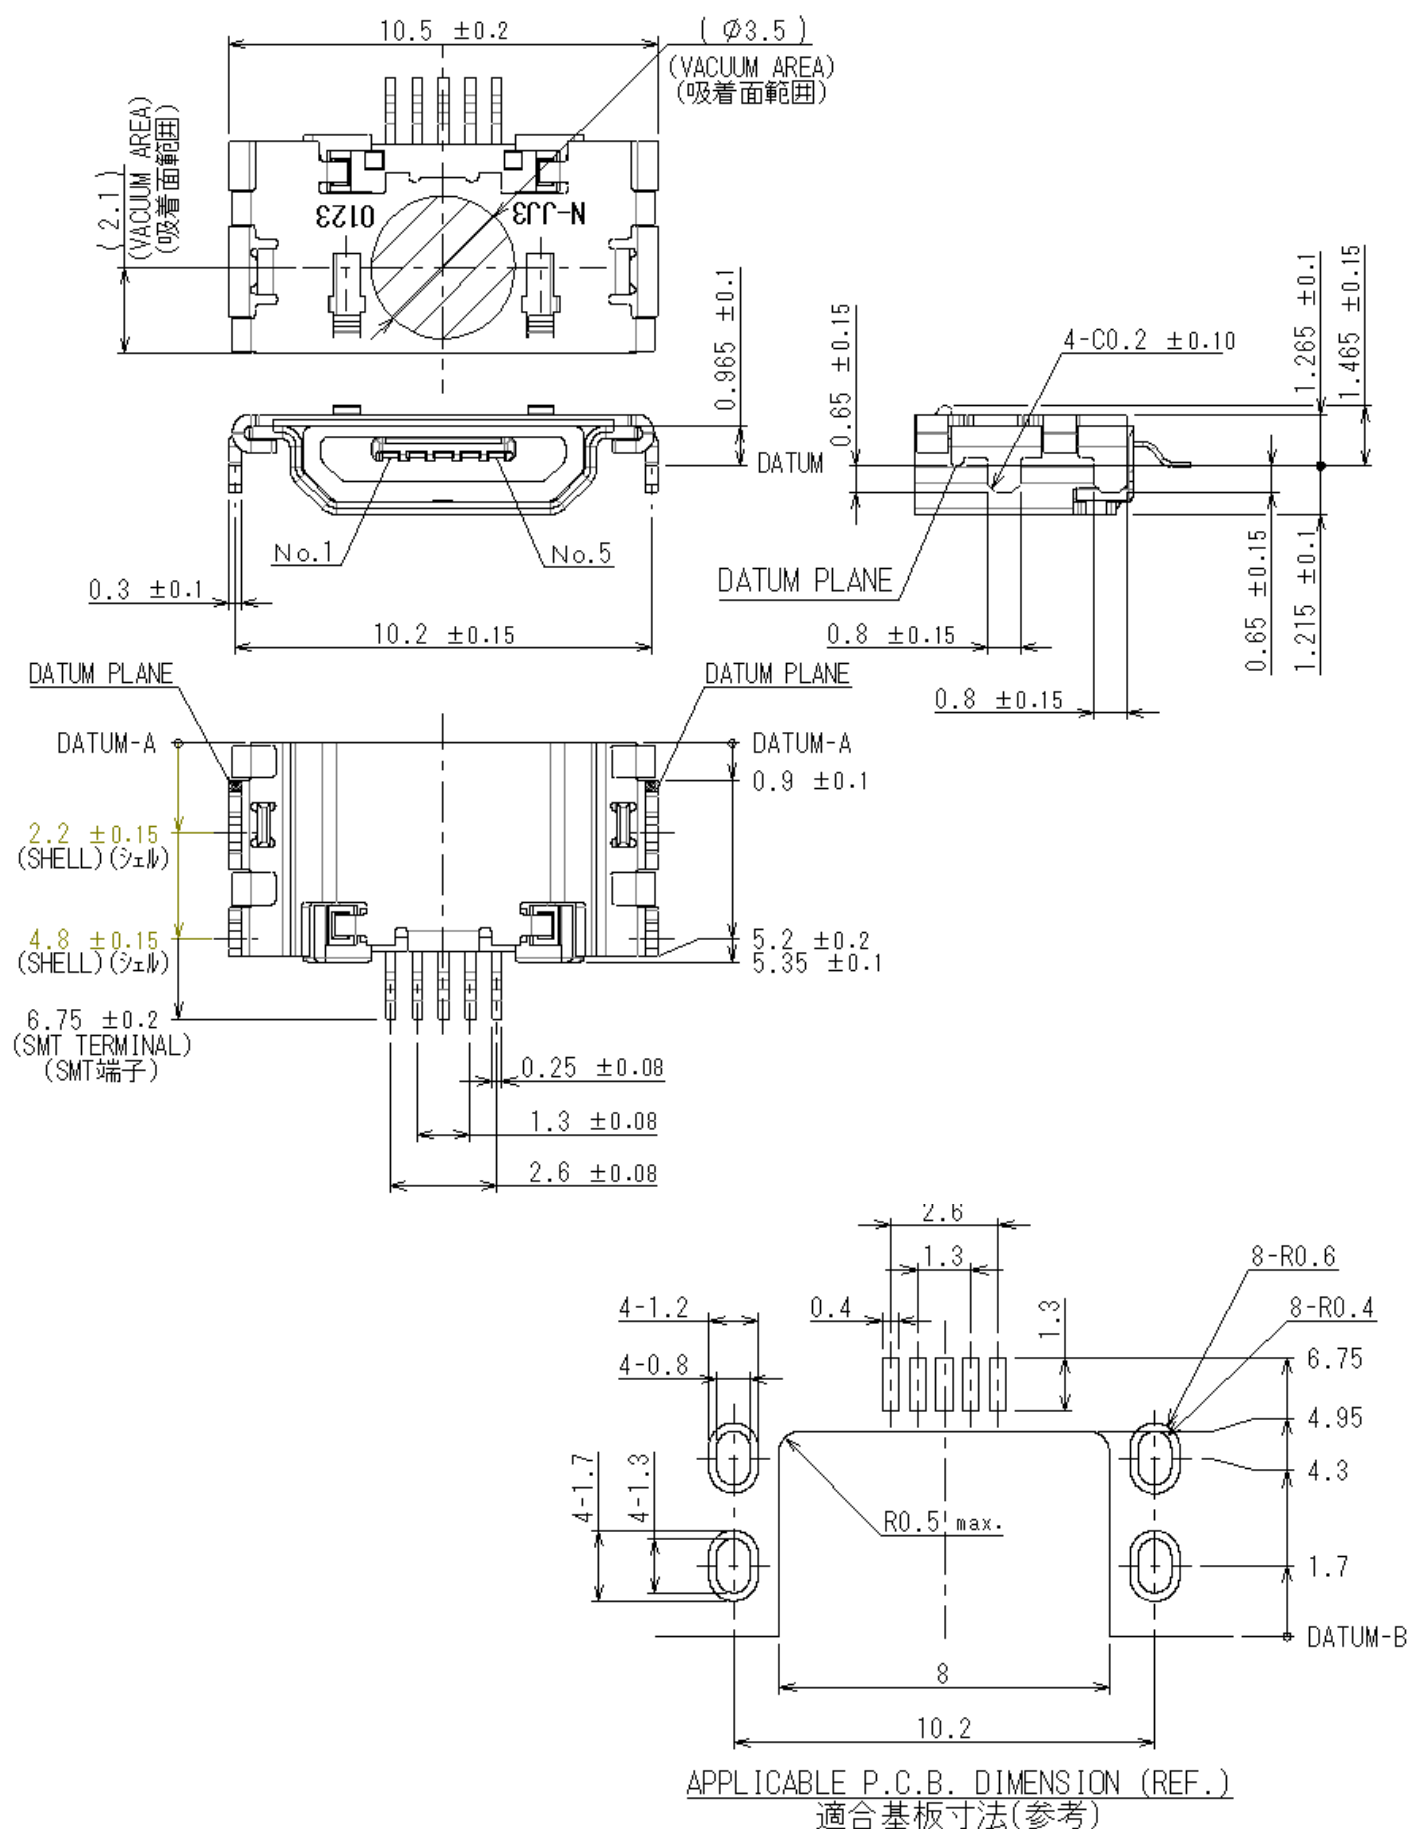


Mating Area Reinforced Type (Micro-B): DX4R105JJC

Unit: mm

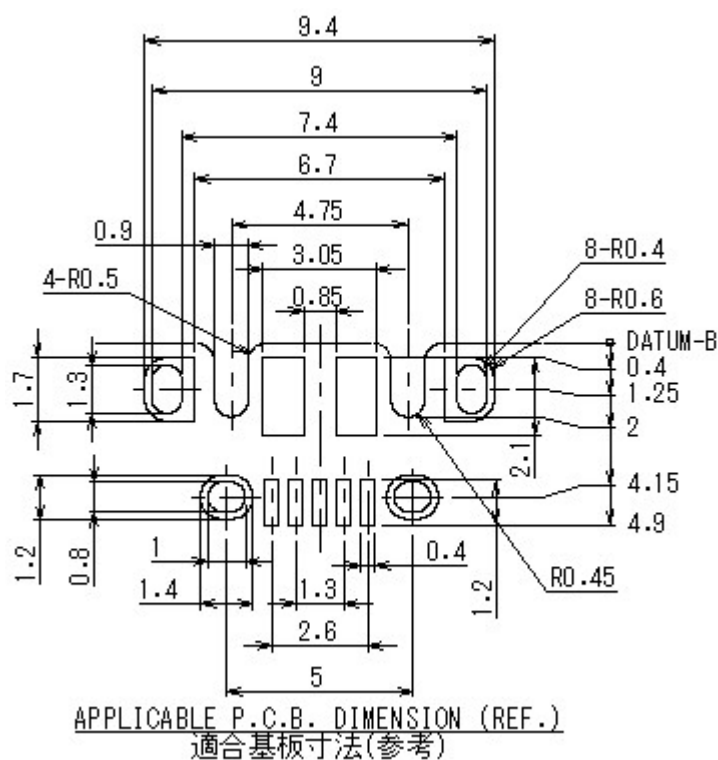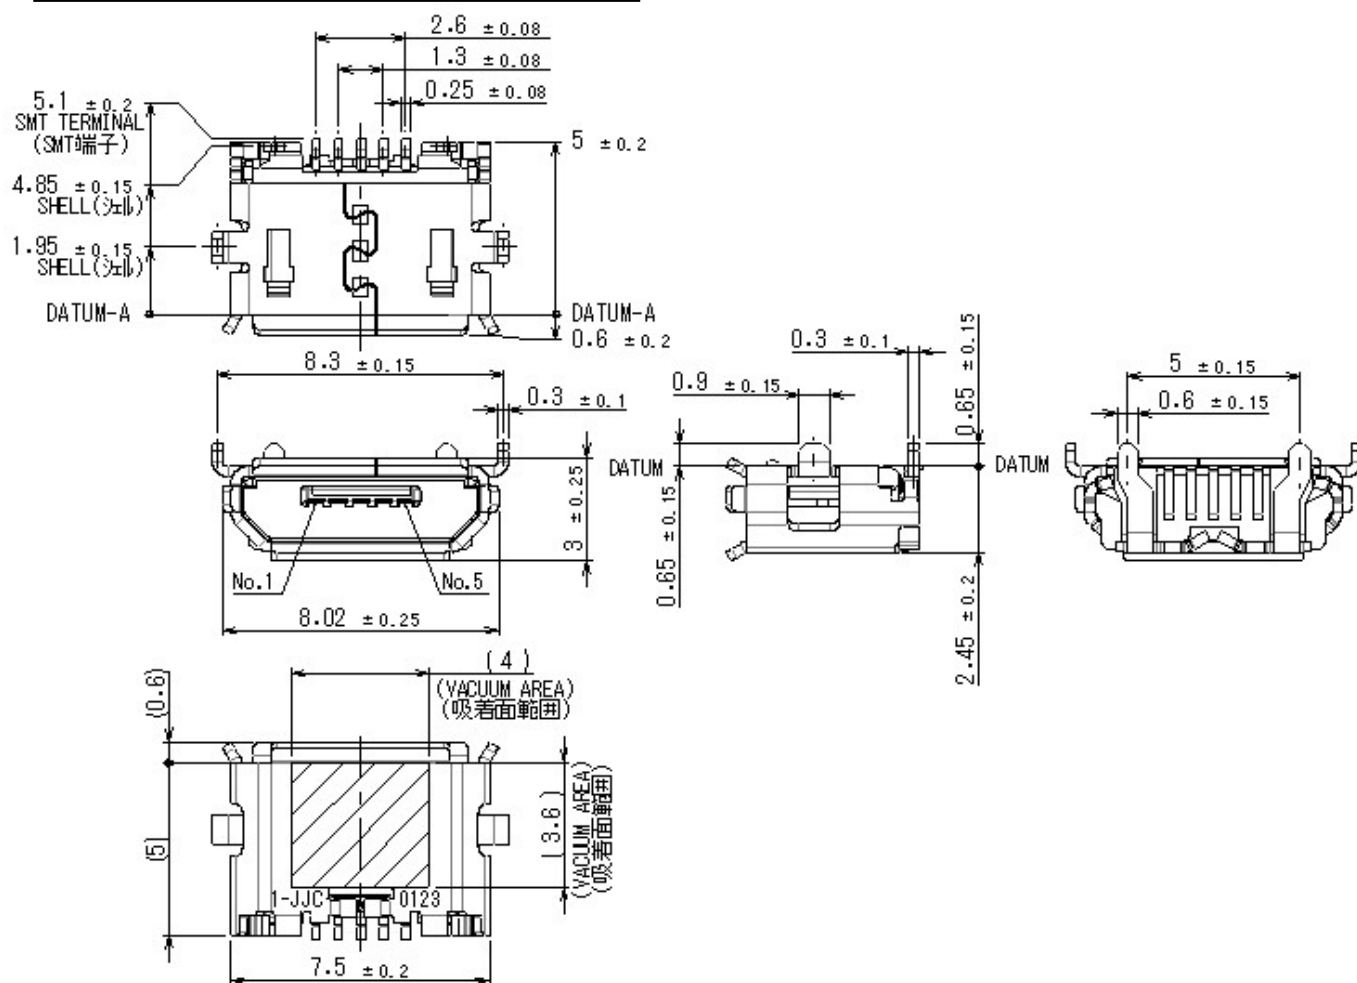

Mating Area Reinforced Type (Micro-AB): DX4R205JJA


Unit: mm

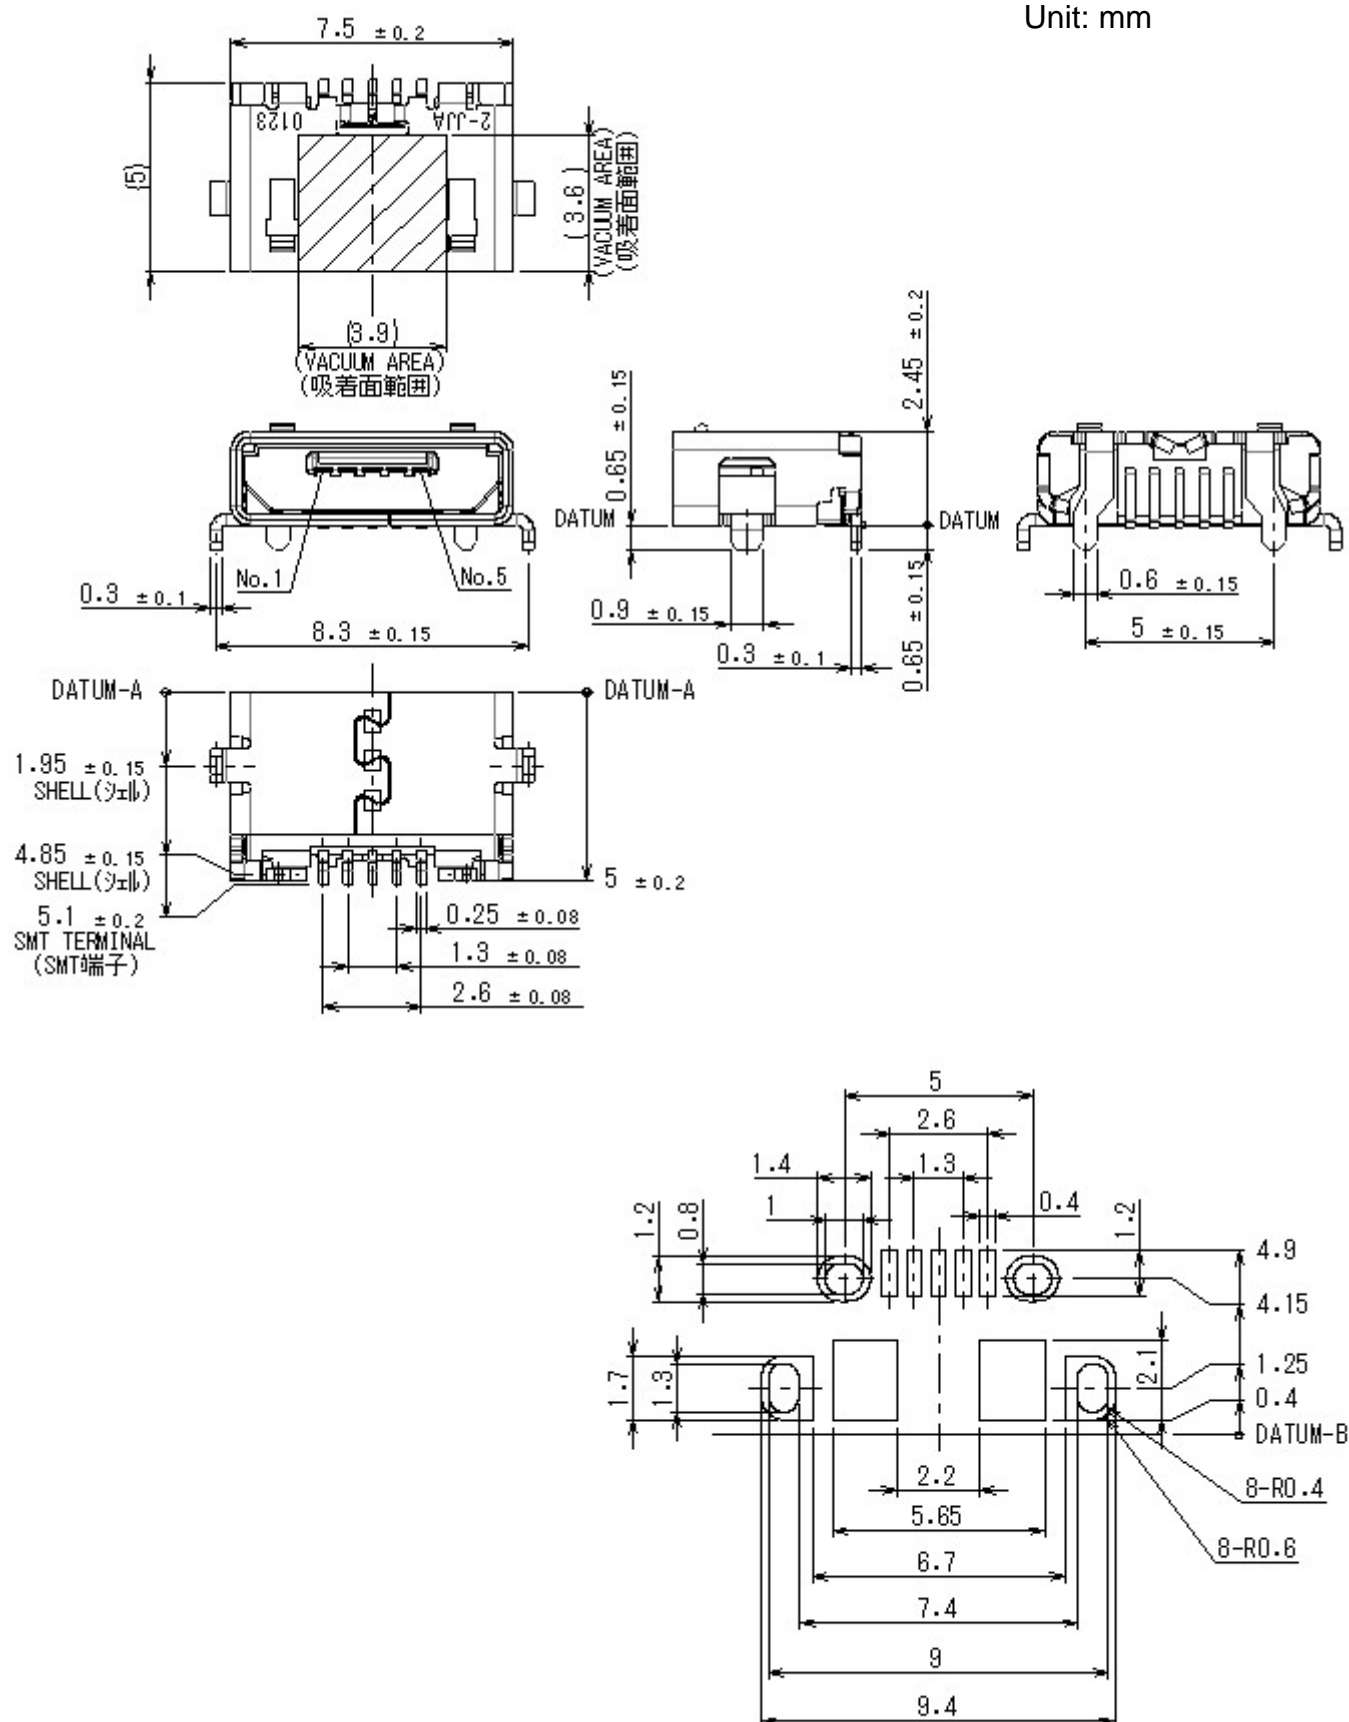

APPLICABLE P.C.B. DIMENSION (REF.)
適合基板寸法(参考)


Mating Area Reinforced Type (Micro-AB): DX4R305JJB

Unit: mm

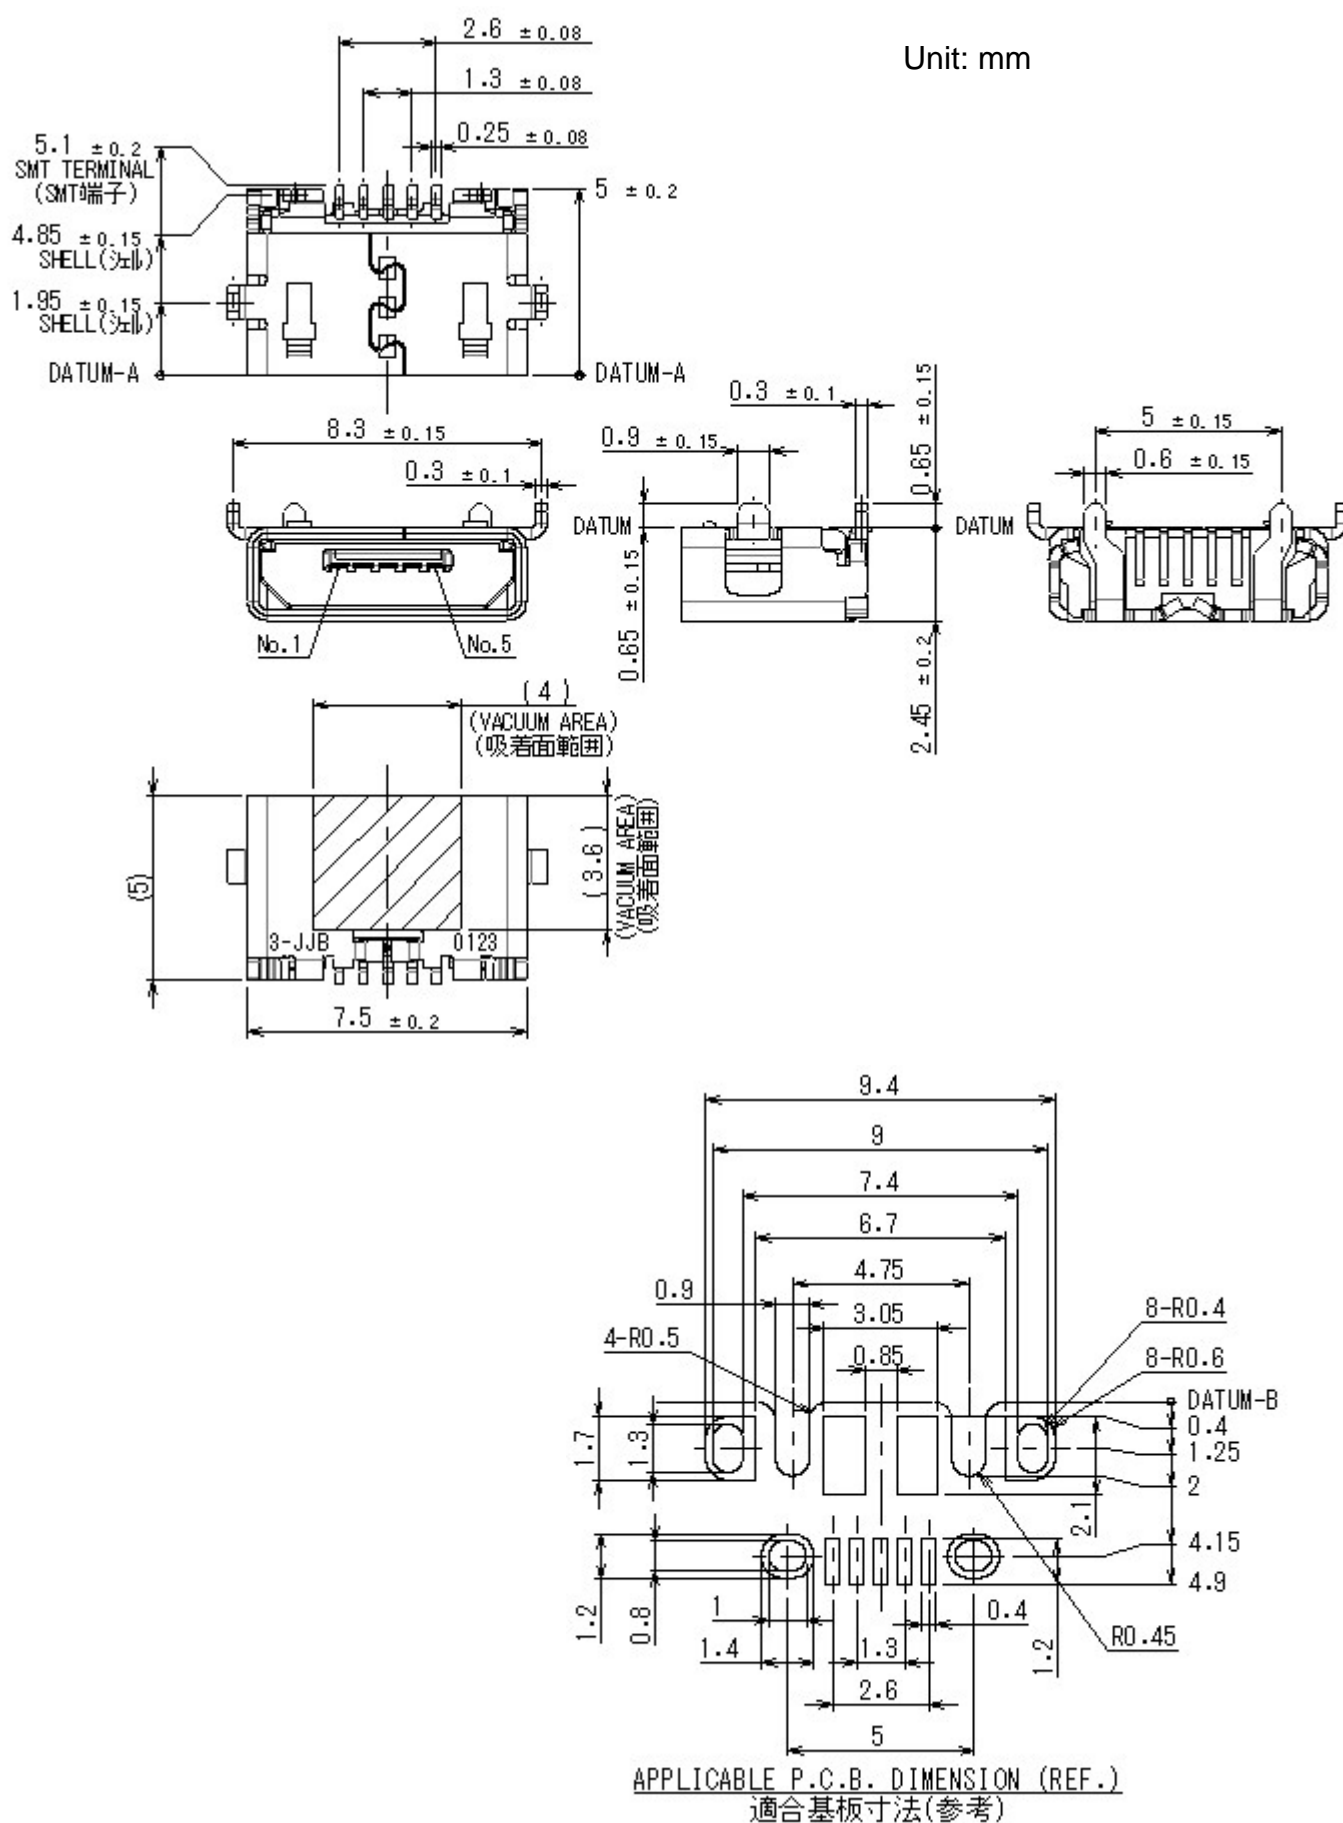


Mating Area Reinforced Type
(Micro-AB): DX4R205JJ8

Unit: mm

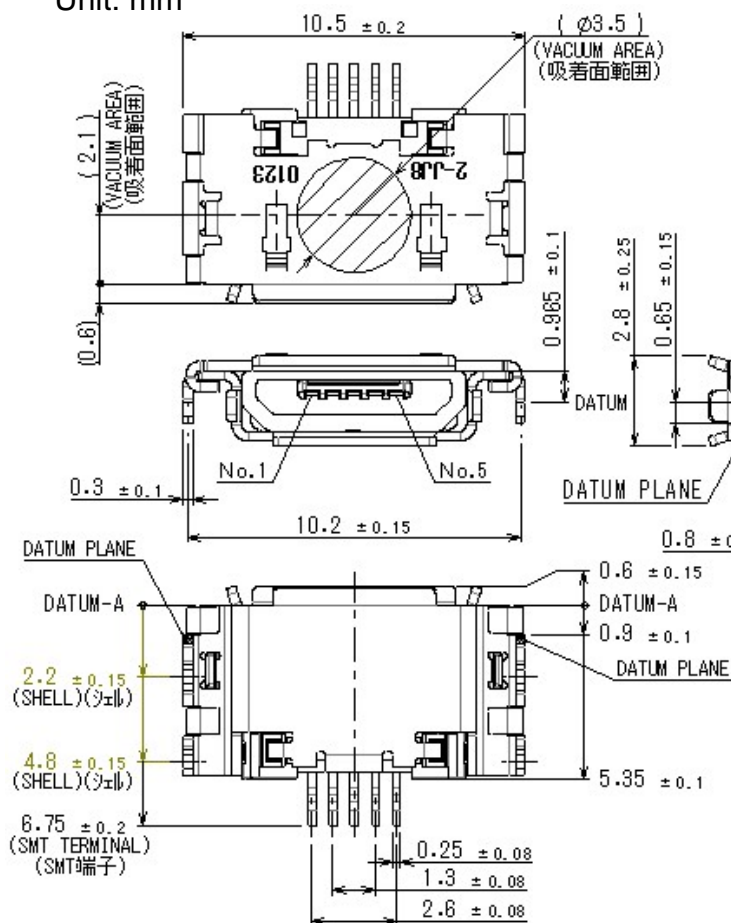

Type without mating area taper (DX4R205JJ9)
 *Design is same as DX4R205JJ8 except the mating area taper.

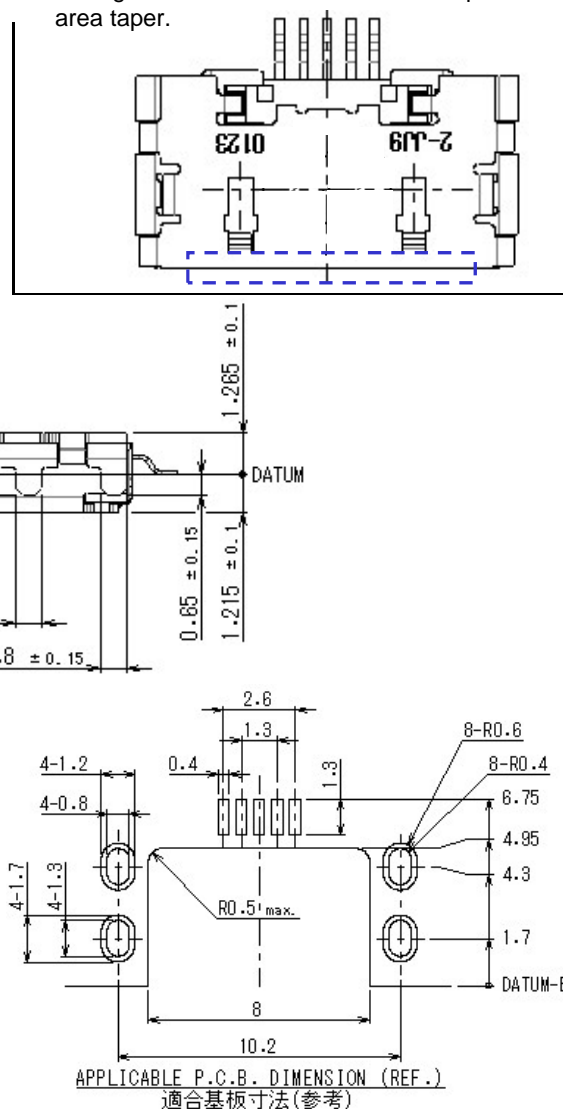

Notice:

1. The values specified in this brochure are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products. For purchase, a product specification must be agreed upon.

2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.

3. The products presented in this brochure are designed for the uses recommended below.

5. The products presented in this brochure are designed for the uses recommended below.

We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:

(i) Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:

Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster prevention equipment, etc.

(ii) We may separately give you our support with a quality assurance program that you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc

Japan Aviation Electronics Industry, Limited

Product Marketing Division

Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539

Phone: +81-3-3780-2882 FAX: +81-3-3780-2946

* The specifications in this brochure are subject to change without notice. Please contact JAE for information.