


SPECIFICATION

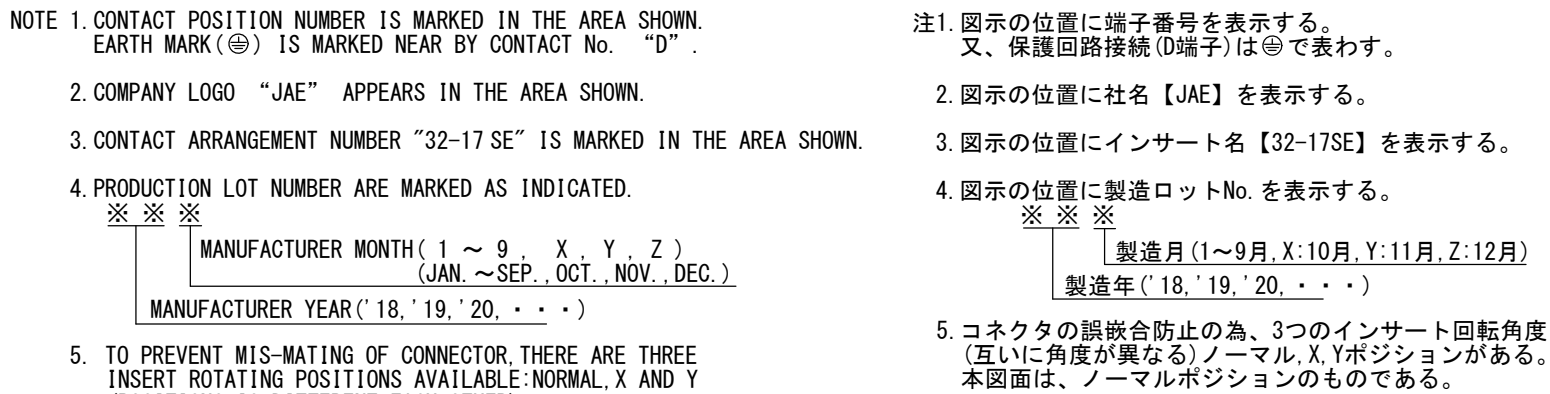

NUMBER OF CONTACT : 4 × #4
RATED VOLTAGE : 500VAC POLLUTION DEGREE:2
OVER VOLTAGE CATEGORY: II
: 250VAC POLLUTION DEGREE:3
OVER VOLTAGE CATEGORY: III
RATED CURRENT : 80A MAX. /ONE CONTACT
DIELECTRIC
WITHSTANDING VOLTAGE : 2000VAC
INSULATION
RESISTANCE : 5000MΩ MIN. (AT 500VDC)
APPLICABLE WIRE : 22m㎡ MAX.

仕様

コンタクト	: #4コンタクト	4本
定格電圧	: 500VAC (汚染度: 2/過電圧範疇: II)	
	: 250VAC (汚染度: 3/過電圧範疇: III)	
定格電流	: 80A以下/1芯	
耐電圧	: 2000VAC	
絶縁抵抗	: 5000MΩ以上 (500VDCにて)	
適用電線	: 22mmφ以下	



14	STRAIGHT END BELL	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
13	"O" RING	1	SYNTHETIC RUBBER	NONE	COLOR:BLACK
12	SET SCREW	1	STEEL	NICKEL PLATING	
11	ASSIST CONDUCTOR	1	COPPER ALLOY	SILVER PLATING	
10	"O" RING	1	SYNTHETIC RUBBER	NONE	COLOR:BLACK
9	SCREW (M2.5)	1	COPPER ALLOY	NICKEL PLATING	
8	RETAINING RING	1	COPPER ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
7	REAR INSULATOR	1	SYNTHETIC RESIN	NONE	COLOR:BLACK
6	GASKET	1	SYNTHETIC RUBBER	NONE	COLOR:BLACK
5	COUPLING NUT	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
4	BARREL	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
3	FRONT INSULATOR	1	SYNTHETIC RESIN	NONE	COLOR:BLACK
2	CONTACT (EARTH)	1	COPPER ALLOY	SILVER PLATING	CONTACT NO. :D
1	CONTACT (LINE)	3	COPPER ALLOY	SILVER PLATING	CONTACT NO. :A, B, C
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		尺度 (SCALE)		シリーズ (SERIES)		日本航空電子工業株式会社		図面番号 (DRAWING NO.)	版数 (VER.)
JACS-5080		12/OCT/2018		1:1		JL04V					
T95-4		製図 DR.	—	名称 (TITLE)		JL04V-6A32-17SE -EB-RK		 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.			
一般公差 (GENERAL TOLERANCE)		担当 CHK.	H. SUZUKI								
寸法 (DIMENSION)		角度 (ANGLES)	承認 APPD.								
±0.8		×° ± /	承認 APPD.	H. EBIHARA	質量 (MASS)				SJ120918		
× ±0.4		×°×' ± /			—						
×× ±0.1											
××× ±											
		単位 (UNIT) : mm									

JAE Connector DIV. Proprietary. Copyright(C) 2018, Japan Aviation Electronics Industry, LTD.