

JA-40GA accelerometer



Key features

- Ultra-low noise
- Excellent thermal stability
- Low frequency operation
- -20 °C to +70 °C operating temperature
- Easy to install

The JA-40GA is a high performance servo balanced quartz accelerometer which has been developed for measuring very low levels of vibration. The signal processing circuit has been optimized to provide very low output noise while maintaining excellent Scale factor and Bias stability over the whole operating temperature range.

Applications

- Structural health monitoring
- Sway and tilt analysis
- Industrial vibration control
- Seismology


The JA-40GA accelerometer is therefore ideal for use in structural health monitoring, active vibration control systems and earthquake observation where the slightest tremors are can be indicative of catastrophe.

Accelerometers must only be exported in accordance with all relevant regulations.

Dimensional drawings

JA-40GA

Unit: mm

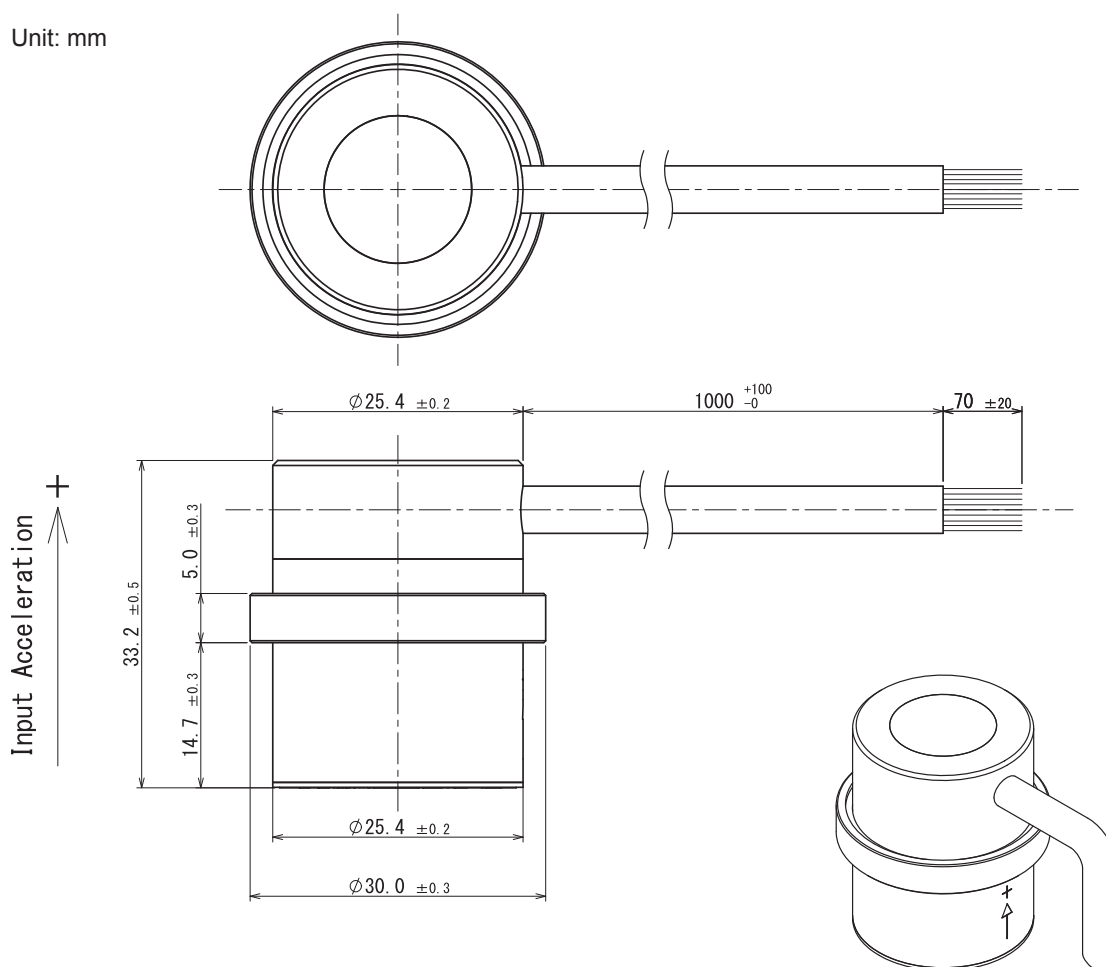


Wire assignment

Cable Colour	Notes
Yellow	Signal Output
White	Signal Return
Gray	Self Test Current (Hi)
Green	Self Test Current (Lo)
Red	+15 V _{DC} Power
Blue	-15 V _{DC} Power
Black	Power Return

Label


xx	Measurement range
02	±2 G min.
04	±4 G min.
08	±8 G min.



Technical data

Environmental				
Temperature	Operating	-20 °C to +70 °C		
	Non-operating	-40 °C to +85 °C		
Vibration	Sine	3.10 mm 0-peak, 20 Hz - 40 Hz		
		20 G 0-peak, 40 Hz - 2,000 Hz		
	Random	10 Grms, 20 Hz - 2,000 Hz		
Shock	Operating/Non-operating	100 G		
Electrical				
Input voltage		$\pm 14.5\text{ V}_{\text{DC}}$ to $\pm 15.5\text{ V}_{\text{DC}}$		
Input current (quiescent)		10 mA max.		
Mechanical				
Weight		115 grams max.		
Performance		JA-40GA02	JA-40GA04	JA-40GA08
Measurement range		$\pm 2\text{ G min.}$	$\pm 4\text{ G min.}$	$\pm 8\text{ G min.}$
Scale factor	Nominal (@ 20 °C)	5.000 V/G $\pm 5\%$	2.000 V/G $\pm 3\%$	1.000 V/G $\pm 5\%$
	Temperature coefficient	$\pm 400\text{ ppm/}^{\circ}\text{C max.}$	$\pm 400\text{ ppm/}^{\circ}\text{C max.}$	$\pm 400\text{ ppm/}^{\circ}\text{C max.}$
Bias	Nominal (@ 20 °C)	$\pm 10\text{ mG max.}$		
	Temperature coefficient	$\pm 100\text{ }\mu\text{G/}^{\circ}\text{C max.}$		
Case alignment	Nominal (@ 20 °C)	$\pm 3.0\text{ mrad}$		
Noise	1 Hz to 30 Hz	$0.1 \times 10^{-6}\text{ G/}\sqrt{\text{Hz max.}}$		
Linearity		$\pm 0.05\%$ full scale max.		
Frequency response (bandwidth)		200 Hz max.		

1 G = 9.80665 m/s²

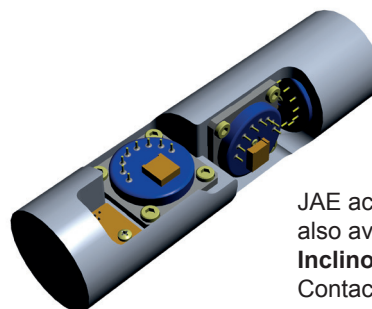

JAE accelerometers are also available as custom **Inclinometer** packages. Contact us for details.

Contact information

North and South America

JAE Electronics, Inc.
1100 W. Park One Drive
Sugar Land
TX 77478
United States

T: +1 281 325 5760
E: support.aerospace@jae.com

Europe

JAE Europe, Ltd.
200 Fowler Avenue
Farnborough Business Park
Hampshire
GU14 7JP
United Kingdom

T: +44 1252 55 11 00
E: support.aerospace@jae.co.uk

Japan and Rest of World


Japan Aviation Electronics
Industry, Ltd.
1-19, Aobadai 3-chome
Meguro-ku
Tokyo 153-8539
Japan

T: +81 3 3780 2925
E: aerinfo@jae.co.jp

More accelerometers from JAE



Industrial
Vibration
Control



Structural
Health
Monitoring



Oil and Gas
Exploration



Civil
Aviation

For more information on these products visit www.jae.com/aero

Document revision table

Document number	Issue	Revision date	Changes
JA-40GA_DS	01	01/02/2017	New document

JAE reserves the right to modify specifications without prior notice.