

RHINO



PRESSURE TRANSDUCERS

MWD COMPATIBLE | RIG TOUGH | MULTIPLE SENSORS

JAE RHINO pressure transducers are engineered for reliability and continuous operation during high-demand measurement-while-drilling (MWD) applications.

APPLICATIONS

- ◆ Uses **4-20mA current loop** pressure signals used in pulse MWD systems.
- ◆ 6-pin connector is standard.
- ◆ Housing supports up to **three pressure sensors in one**, depending on the chosen union base.

FEATURES

- ◆ **Compatible** - With industry standard MWD systems using **4-20mA current** to transmit the pressure readings.
- ◆ **Multiple Sensors** - Get *one, two, or three* sensors in a housing, configurable for individual or simultaneous operation.
- ◆ **Redundancy** - Switch input sensors without interruption and minimize down-time with a new generation of MWD technology that works seamlessly with the **JAE SMART DECODER™** out now.



CONTACT US

www.jae.com/en/Motion_Sensor_Control

JAE Electronics, Inc. (USA)

1100 West Park One Dr.
Sugar Land, Texas 77478 USA
Tel : +1-281-325-5760
support.aerospace@jae.com

JAE Europe, Ltd.

Royal Pavilion, Tower 3, First Floor, Wellesley Rd.
Aldershot, Hampshire, GU11 1PZ, UK
Tel : +44-1252-55-11-00
support.aerospace@jae.co.uk

Japan Aviation Electronics Industry, Ltd.

Aerospace Sales Division
1-19, Aobadai 3-chome, Meguro-ku, Tokyo, 153-8539, Japan
Tel : +81-3-3780-2925

SPECIFICATIONS



EXTERNAL

BASE DIAMETER	93.98 mm (3.70 in.)
HOUSING DIAMETER	82.55 mm (3.25 in.)
PRODUCT HEIGHT	147.98 mm (5.83 in.)
MATERIAL	300 Series Stainless Steel

MECHANICAL


PROCESS CONNECTION	WECO 1502 Hammer Union
OUTPUT SIGNAL CONNECTION	PT02A-10-6P

ELECTRICAL

SUPPLY VOLTAGE	9 VDC to 36 VDC
OUTPUT SIGNAL	4mA to 20mA
INSULATION RESISTANCE	>100 MΩ

SENSOR

SENSOR QUANTITY	1, 2, or 3 (Model Dependent)
PRESSURE RANGE	0 to 10,000 psi
OVER-PRESSURE RATING	12,000 psi
ACCURACY	± 1%
OPERATING TEMPERATURE	-40°C to +125°C (-40°F to +257°F)

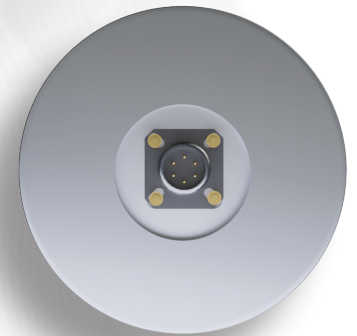

82.55 mm (3.25 in.)



147.98 mm (5.83 in.)



93.98 mm (3.70 in.)